

# FRICION STIR WELDING - A REVIEW

<sup>1</sup>G.C.Jadhav, <sup>2</sup>R.S.Dalu

<sup>1</sup>PhD Research Scholar, Mechanical Engineering, Government College of Engineering, Amravati-444601, India,

<sup>2</sup>Professor and Head, Mechanical Engineering, Government College of Engineering, Amravati-444601, India.

**Abstract:** Friction Stir Welding (FSW) is a novel green solid state joining process. This joining technique is energy efficient, environment friendly, and versatile. The Principle advantages are fine microstructure, low distortion, absence of melt related defects and high joint strength. FSW parameters like tool rotational speed, welding speed and axial force play an important role. In this paper, literature on FSW has been reviewed, the gaps have been identified.

**Index Terms -** Friction stir welding, tool rotational speed, welding speed, axial force, microstructure, tensile strength.

## I. INTRODUCTION

The friction stir welding (FSW) process was invented in 1991 by The Welding Institute (TWI) at Cambridge, in United Kingdom. It was further developed and was got patented by The Welding Institute (7). The first built and commercially available friction stir welding machines were produced by ESAB11. Welding and Cutting Products at their equipment manufacturing plant in Laxa, Sweden. The development of this process was a significant change from the conventional rotary motion and linear reciprocating friction welding processes. It provided a great deal of flexibility within the friction welding process group.

Friction stir welding (FSW) is a solid state process for joining similar and dissimilar materials (21). The friction stir welding is very recent trends in the manufacturing technology of metal joining processes especially for aluminum alloys. Many various engineering industries will give importance for aluminum and aluminum based alloys. Friction stir welding was initially applied to aluminium alloys (3, 4, 5). A non-consumable rotating tool with a specially designed pin and shoulder is inserted into the abutting edges of sheets or plates to be joined and traversed along the line of joint. The parts have to be suitably clamped rigidly on a backing bar to prevent the abutting joint faces from being forced apart. The length of the pin is slightly less than the required weld depth (28). The plunging is stopped when the tool shoulder touches the surface of the job. The tool shoulder should be in intimate contact with the work surface. The function of tool is heating of work-piece, and movement of material to produce the joint. The heating is accomplished by friction between the tool and the work-piece and plastic deformation of work-piece (32). The localized heating softens the material around the pin and combination of tool rotation and translation leads to movement of material from the front of the pin to the back of the pin. Because of various geometrical features of the tool, the material movement around the pin can be quite complex [6]. Here a substantial forging force is applied by the tool to consolidate the plasticized metal behind the tool. The welding of the material is facilitated by severe plastic deformation in the solid state involving dynamic recrystallization of the base material. As the tool is moved along the seam the desired joint is created. The schematic view of the operation is shown in Fig. 1.1 [9].

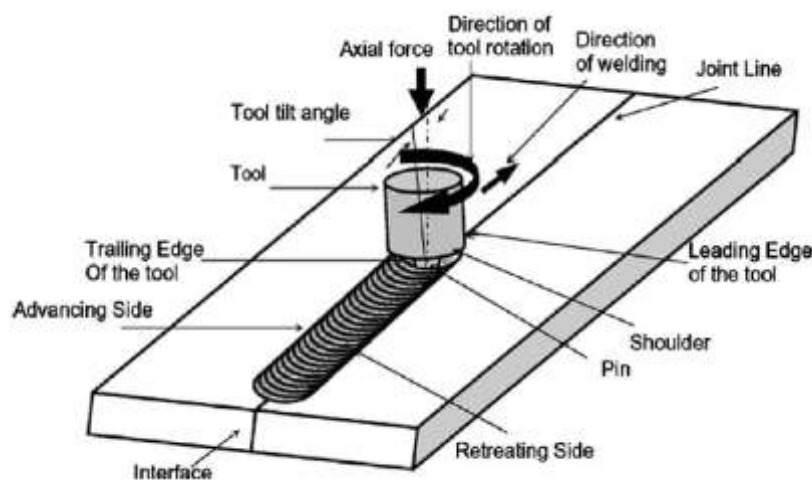


Figure 1.1 Schematic diagram of FSW

There are two different modes of material flow involved in friction stir welding called pin driven and shoulder driven flow [10]. The material flow is layer wise in pin driven region, and it is bulk in shoulder driven region. When the material escapes out of the

weld cavity due to insufficient axial pressure, it results in flash formation. Friction stir welding can be applied to various types of joints like butt joints, lap joints, T butt joints, pipes and fillet joints with different thickness and different profile. These are pictured in Fig. 1.2 along with a T-joint [40].

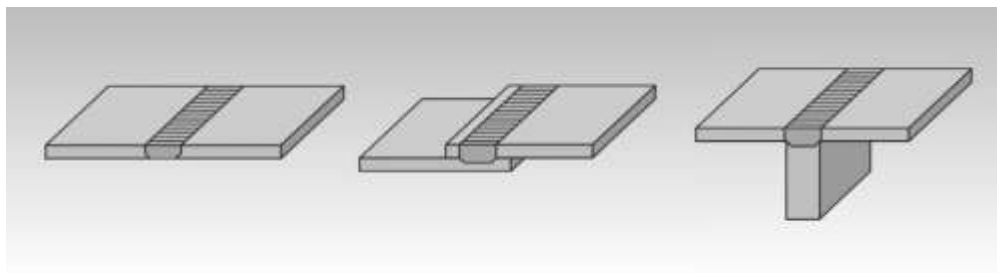


Figure 1.2 Common joint types: square butt, lap, and T-joint.

## II. CLASSIFICATION OF LITERATURE

Literature review has been classified into five categories as given below.

History and development, advantages and applications of FSW, process parameters, performance parameters and future scope in FSW.

### 2.1 History and Development

In 1993, NASA challenged Lockheed Martin Laboratories in Baltimore, Maryland, to develop a high-strength, low-density, lighter-weight replacement for aluminum alloy Al 2219 used on the original Space Shuttle External Tank (14). Lockheed Martin, Reynolds Today, the External Tank project uses the new alloy to build the Shuttle's Super Lightweight Tanks.

Since 1995 in Europe, Friction Stir Welding has been used in production applications. The first applications involved welding of extrusions to form panelling for marine applications. Since then, the process has been commercialized in many other applications. In 1997 the Institute of Materials Research of the German Aerospace Center (DLR), was the first non-industrial research institute in Germany working in the field of friction stir welding of aluminium alloys and one of the first TWI licensees in Germany(13). The FSW is performed on a very stiff, numerically controlled bedplate milling machine.

Table 1: Chronology of production applications for FSW through (10)

Year	Applications	Company
1995	*Hollow heat exchangers	Marine Aluminium, Norway
1996	*Commercial shipbuilding	Marine Aluminium, Norway
1998	Delta rockets	Boeing, US
1999	*Commercial shipbuilding	Sapa, Sweden
2000	*Automotive components	Sapa, Sweden
2000	Laser system housing	General Tool, US
2001	*Motor Housings	Hidro Aluminium (formerly Marine Aluminium), Norway
2001	*Train bodies	Hitachi, Japan
2001	*Automotive components	Showa, Japan
2003	*Automotive components	Tower Automotive, US
2003	*Commercial shipbuilding	Advanced Joining Technology, US
2004	Space shuttle external tanks	Lockheed Martin, US
2004	Food trays	RIFTEC, Germany

\*Denotes welding of extrusions

Friction stir welding is still considered to be the most significant development in joining of materials in last 20 years (4, 5, 7, 49, 50, 54). Many sophisticated welding methods for different alloys of variety applications are available now.

## 2.2 Advantages of FSW

FSW is recommended for the purpose of welding as it produces low distorted products with no fumes, porosity, spatter consumables etc. The advantages of FSW are shown in table no.2.

Table 2: Advantages of FSW

Sr.	Advantages	References
1	FSW is a green and environmentally friendly welding technology The welding process does not require filler wires or edge preparation and no gas emission. No porosity, no spatter, low shrinkage. The process is clean and does not produce any major safety hazards, such as welding fume or radiation.	3,4,6,16,19,28,32,33,44,52,61,77.
2	Low distortion of workpiece, reduced residual stress. Good dimensional stability and repeatability. Fine microstructure, Absence of cracking and voids. Good corrosion resistance, formability and weldability. Eliminate grinding wastes. Decreased fuel consumption in light weight applications.	5,10,11,19,51,68,73,99
3	High quality, high strength, Neither cooling water nor compressed air are required which allows for broad reductions in both equipment and running cost. No need for a large electrical current. Joining of dissimilar materials, similar metals.	21,43,76,104

## 2.3 Applications of FSW

There are wide applications of FSW process. Some of which are given below.

- i) FSW is used in railway industries to build railway tankers and container bodies (2, 5, 6,11 )
- ii) Also used in shipping, marine and automotive industries, e.g. manufacturing of hulls, aluminum extrusions and offshore accommodations (9, 10, 12, 13).
- iii) FSW can also be considered for electric motor housing, cooking equipments, kitchens, gas tanks, gas cylinders and connection of aluminium or copper coils in rolling mills.
- iv) All transport industries including pipe lines, storage tanks, shipbuilding, offshore, rail(high speed trains, carriages), automotive (chassis, wheel rims, space frames, truck bodies) and aerospace (civil and military aircraft) are using this technology (3, 10, 20, 21, 25, 32).
- v) Widely used in making furniture, doors, and light structures (77), land transport, motorcycle and refrigeration industries (82).

## 2.4 Process Parameters

Finding the most effective parameters on properties of friction stir welds as well as realizing their influence on the weld properties has been major topics of interest for researchers. There are many factors or variables that can be affect the output response. The primary variables are tool material, shape and size, tool rotational velocity, welding speed, tool tilt and plunge depth. All of these variables can affect weld properties significantly. The process parameter which influences the formation of weld joint are tool rotational speed, traverse speed, tool tilt angle, force exerted by the tool and plunge depth also material used for joining and its thickness. When compared to aluminium and its alloys, FSW process has been used for aluminium alloys (1xxx, 2xxx, 3xxx, 5xxx, 6xxx, 7xxx). The most commonly used tool materials for FSW process are H13 and high speed steel. The tool material should have higher melting temperature than the work material. Defects can be minimized by properly selecting the process parameters. These parameters and material properties are responsible for the temperature profiles, cooling rate and torque exerted by the tool. When compared to conventional fusion welding process, the peak temperature and diffusion of heat source is significantly low. With respect to axial pressure, when the rotating speed increases the peak temperature also rises in the weld zone. Many investigators used different process parameters in FSW as shown in the table 3.

Table 3: Process parameters of FSW

Sr.	Process parameters	Researchers
1	Tool rotational speed	6,9,32,33,35,37,42,50,52,56,57,60,64,69,71,72,73,74,78,83,88,89,91,93,95,97,99,100,105,106.
2	Welding speed	6,9,32,33,35,37,50,52,56,57,60,64,69,71,72,73,74,78,88,89,91,93,95,97,99,100,105,106.
3	Axial force	6,32,93,74.
4	Shoulder diameter	33,39,52,56,57,60,69,83,88,91.
5	Tilt angle	33,52,56,60,91.
6	Tool profile	6,51,69,78,83,89,91.
7	Pin diameter	6,52,56,57,69,78,83,89,106.
8	Pin length	52,56,57,69,78,89,106.

## 2.5 Performance Parameters

Many investigators used different performance process parameters in FSW as shown in the table 4.

Table 4: Performance parameters of FSW

Sr.	Performance parameters	Researchers
1	Tensile strength	9,29,30,31,32,33,34,35,36,37,39,48,52,57,59,60,64,65,72,74,77,83,91,93,97,98,99,100,101,102,104,105,106.
2	Micro hardness	29,30,31,34,39,48,60,64,72,74,77,78,91,97,98,99,100,102,104,105.
3	Microstructure	6,9,29,30,31,34,39,48,49,52,60,64,65,74,77,91,93,97,98,99,100,102,104,105,106.
4	% Elongation	32,35,36,37,52,65, 83,91,99,104
5	Yield strength	32,35,36.

## 2.6 Optimization of Performance Parameters

Process parameters have great influence on the heat distribution, material flow pattern and structure, etc. There are various techniques that explore the effectiveness of the process parameters that would help in optimization of process parameters. Some methods used by researchers are shown in the table 5.

Table 5: Methods used for optimization of performance parameters

Sr.	Optimization of process parameters	References number Researchers
1	Response Surface Methodology (RSM) and ANOVA test.	31,32,37,83,93,109
2	Taguchi orthogonal design.	59,105,106,107,108,109
3	Hyper Extrude Software, Ansys software.	71

## III. GAPS IN LITERATURE

After a comprehensive study of the existing literature, gaps have been identified and presented below.

- i) Most of the researchers have investigated the influence of a limited number of process parameters on the FSW of aluminium alloys.
- ii) Literature lack some specific research that would focus on the impact of the FSW process parameters specifically on the tensile strength of the joint, quality of the weld (by concerning majorly on the defects formed in the weld joints), and heat affected zones.
- iii) There is need to focus on the other parameters like tool material, pin profile, tilt angle and pin depth and their effect on the mechanical properties of the joints and special focus on the dissimilar aluminium alloys.
- iv) The researchers have carried out most of the work on varying one parameter at a time and no consideration has been given to interaction effect of two or more parameters.
- v) There is less study on relative contribution of all the controllable process parameters on the weld qualities.
- vi) Selection of cost effective FSW tools and process parameters.
- vii) Optimization of process parameters.
- viii) Identify the significant process parameters of FSW.

Thus, keeping in view of the above research gaps, it is planned to investigate the effect of FSW process parameters on mechanical and metallurgical properties of friction stir welding of aluminium alloys using design of experiment technique.

## IV. CONCLUSION

From the given literature review, the researchers reported that each process of parameter has its specific impact on the properties of the joints. Some of them are tool rotational speed, axial force, tool pin profile and tilt angle. This study helps in understanding the wide range of application of aluminum and its alloys in various sectors. Without the application of aluminium, alloys in industries are unimaginable. We find its importance in welding of aluminium alloy AA6061. The objectives taken by me from literature review studies the effect of FSW process parameters on tensile strength of weld, to study the effect of FSW process parameters on weld quality and the study of FSW effect in process parameters on heat affected zone.



## REFERENCES

- [1] M. Ecomoto., 2003. Friction stir Welding: Research and industrial applications. *Welding International*, 17(3):341-345.
- [2] Thomas W. M. and Nicholas E. D. 1997. Friction stir welding for the transportation industries. *Materials & Design*, 18:269-273.
- [3] C.J. Dawes and W.M. Thomas. 1996. Friction Stir Process Welds Aluminum Alloys. *Weld. Journal*, 75: 41–45
- [4] Thomas W. M.. 2003. Friction stir welding – recent developments. *Mater Sci. Forum*, 426–432:229–36.
- [5] Mishra R. S. and Ma Z. Y. 2005. Friction stir welding and processing. *Mater Sci Eng, Rep* 50 (1–2):1–78.
- [6] Indira Rani M, Marpu R. N. and A.C.S. Kumar. 2011. A study of process parameters of friction stir welded AA6061 aluminium alloy in o and t-6 conditions. *APRN Journal of Engineering and Applied Science Engineering*, 6(2).
- [7] Thomas W M, Nicholas E D, Needham J C, Murch M G, Temple-Smith P and Dawes CJ. 1991. Friction stir butt welding. International Patent Application No. PCT/GB92/02203.
- [8] Mustafa Boz and Adem Kurt. 2004. The Influence of Stirrer Geometry on Bonding and Mechanical Properties in friction stir welding process. *Journal of Materials and Design*, 25:343-347.
- [9] Singh R. K. R, Sharma C, Dwivedi D. K, Mehta N. K. and Kumar P. 2011. The microstructure and mechanical properties of friction stir welded Al–Zn–Mg alloy in as welded and heat treated conditions. *Materials and Design*, 32: 682–687.
- [10] Daniela Lohwasser and Zhan W. Chen. 2010. Friction stir welding: From basics to applications. Auckland University of Technology, New Zealand Woodhead Publishing Ltd. and CRC Press LLC.
- [11] FSW-Technical Handbook, ESAB AB, Welding Automation, SE-695 81 LAXÅ, Sweden, Phone: +46 584-81000
- [12] S.W. Kallee, J. Davenport, and E.D. Nicholas. 2002. Railway Manufacturers implement friction Stir Welding. *Weld. J*, 81: 47–50
- [13] M.R. Johnsen. 1999. Friction Stir Welding Takes off at Boeing. *Weld. J*, 78: 35–39
- [14] J. Ding, R. Carter, K. Lawless, A. Nunes, C. Russel, M. Suits, and J. Schneider. 2006. Friction Stir Welding Flies High at NASA. *Weld. J*, 85: 54–59
- [15] J.W. Arbegast. 2006. Friction Stir Welding. *Weld. J*, 85: 28–35
- [16] R. Rai, A. De H. K. D. H. Bhadeshia, T. Deb Roy. 2011. Review: friction stir welding tools, *Science and Technology of Welding and Joining*, Vol. 16.
- [17] Y. N. Zhang, X. Cao, S. Larose and P. Wanjara. 2012. Review of tools for friction stir welding and processing. *Canadian Metallurgical Quarterly*, Vol. 51.
- [18] D. Arvindkumar and A. Balamurugan. 2016. A Review On Friction Stir Welding Of Dissimilar Material Between Aluminium Alloys To Copper. *International Journal of Latest Research in Engineering and Technology (IJRET)*, ISSN:2454-5031, 2(2): 09-15
- [19] N. Ravinder Reddy and G. Mohan Reddy. 2016. Friction Stir Welding Of Aluminium Alloys-A Review. *International Journal of Mechanical Engineering and Technology*, 2(2):73-80.
- [20] N. Bhanodaya Kiran Babu et al. 2011. A Review Of Friction Stir Welding Of AA6061 Aluminium alloy. *APRN Journal of Engineering and Applied Sciences*, 6(4):61-63
- [21] D. Arvindkumar and A. Balamurugan. 2016. A Review On Friction Stir Welding Of Dissimilar Material Between Aluminium Alloys To Copper. *International Journal of Latest Research in Engineering and Technology (IJRET)*, ISSN:2454-5031, 2(2): 09-15
- [22] W.M. Thomas, K.I. Johnson, and C.S. Wiesner. 2003. Friction Stir Welding—Recent Developments in Tool and Process Technologies. *Adv. Eng. Mater*, 5: 485–490
- [23] Prof. Bharat Raj Singh. 2012. A Hand Book on Friction Stir Welding, Research Gate, DOI: 10.13140/RG...2.1.5088.6244.
- [24] Peel M, Steuwer A, Preuss M and Withers P. J. 2003. Microstructure, mechanical properties and residual stresses as a function of welding speed in aluminium AA5083 friction stir welds. *Acta Mater* 51, doi:10.1016/S1359-6454(03)00319-7:4791–4801
- [25] Cavaliere, P, Nobile, R, Panella, F and Squillace. 2006. A Mechanical, Microstructural Behaviour of 2024-7075 Aluminum Alloy Sheets Joined by Friction Stir Welding”, *International Journal of Machine Tools and Manufacture*, 46: 588 – 594.
- [26] K. Kumar and Satish V. Kailas. 2008. The role of friction stir welding tool on the material flow and weld formation. *Material science and Engineering A*, 485: 367 – 374.
- [27] FSW-Technical Handbook, ESAB AB. Welding Automation, SE-695 81 LAXÅ, Sweden, Phone: +46 584-81000.
- [28] Peel M, Steuwer A, Preuss M and Withers P J. 2003. Microstructure, mechanical properties and residual stresses as a function of welding speed in aluminium AA5083 friction stir welds. *Acta Mater*, –doi:10.1016/S1359-6454(03)00319-7, 51: 4801-4791.
- [29] Ahmed Khalid Hussain and Syed Azam Pasha Quadri. 2010. Evaluations of parameters of friction stir welding for aluminium AA6351 alloy. *International Journal of Engineering Science and Technology*, 2(10):5977-5984.
- [30] Sakthivel T., Sengar G. S. and Mukhopadhyay J. 2009. Effect of welding speed on microstructure and mechanical properties of friction-stir-welded aluminium. *Int. J. Adv. Manufacturing Technology*, 43: 468–473.
- [31] S. Rajakumar and V. Balasubramanian. 2012. Establishing relationships between mechanical properties of aluminium alloys and optimised friction stir welding process parameters. *Materials and Design*, 40:17–35.
- [32] G. Elatharasan, V.S. and Senthil Kumar. 2013. An experimental analysis and optimization of process parameter on friction stir welding of AA6061-T6 aluminium alloy using. *Procedia Engineering*, 64:1227-1234
- [33] Prashant Prakash et al. 2013. A study of process parameters of friction stir welded AA6061 aluminium alloy”, *International Journal of Innovative Research in Science, Engineering and Technology*, 2(6).

- [34] J.F. Guo et al. 2014. Friction stir welding of dissimilar material between AA6061 and AA7075 Al alloys effects of process parameters. *Material and Design*, 56:185-192
- [35] K.V.P.P. Chandu et al. 2013. The strength of friction stir welded aluminium alloy 6061. *IJRMET*, 4(1):119-122
- [36] H.S. Patil and S.N. Sonam. 2012. Experimental study on the effect of welding speed and tool pin profiles on AA6082-O aluminium friction stir welded butt joints. *International Journal of Engineering Science and Technology*, 2(5):268-275
- [37] V.L. Shrinivas et al. 2013. Parametric Analysis of Friction Stir Welding on AA6061 Aluminium Alloy. *International Journal of Mechanical Engineering and Research*, 3(5):557-564
- [38] Shubham Kumar et al. 2013. Friction Stir Welding of Aluminium. *International Conference on Emerging Trends in Engineering & Technology*, 12-13.
- [39] Deepti Anil Kumar et al. 2013. A Study on Friction Stir Welding of 12mm Thick Aluminium Alloy plates. *J. Marine Sci. Appl*, DOI:10.1007/S 11804-013-1221-y.
- [40] Z. Y. MA. 2008. Friction Stir Processing Technology: A Review. *Metallurgical and Materials Transactions*. 39A: 642 – 658.
- [41] W.M. Thomas. 1998. Friction Stir Welding and Related Friction Process Characteristics. *INALCO98 7th International Conference, Joints in Aluminium*, Cambridge, UK.
- [42] W.M. Thomas, E.D. Nicholas, E.R. Watts, and D.G. Staines. 2002. Friction Based Welding Technology for Aluminium. *The 8th International Conference on Aluminium Alloys*, Cambridge, UK.
- [43] Kawasaki Heavy Industries Ltd. 2014. A New Method for Light Alloy Joining, Friction Spot Joining, [www.kawasakirobot.com](http://www.kawasakirobot.com).
- [44] J. Defalco. 2006. Friction Stir Welding vs. Fusion Welding. *Weld. J*, 85: 42–44
- [45] J.W. Arbogast. 2006. Friction Stir Welding. *Weld. J*, 85: 28–35
- [46] R.S. Mishra and M.W. Mahoney and Eds. 2007. Friction Stir Welding and Processing. ASM International, Materials Park, Ohio, USA.
- [47] W.M. Thomas, E.D. Nicholas, J.C. Needham, M.G. Murch, P. Temple-Smith, and C.J. Dawes. 1991. International Patent Application No. PCT/ GB92/02203 and GB Patent Application No. 9125978.8 and US Patent Application No. 5,460,317.
- [48] W.B. Lee, Y.M. Yeon, and S.B. Jung. 2003. The Improvement of Mechanical Properties of Friction Stir Welded A356 Al Alloy. *Mater. Sci. Eng.*, 355A: 154–159
- [49] C.G. Rhodes, M.W. Mahoney, W.H. Bingel, R.A. Spurling, and C.C. Bampton. 1997. Effects of Friction Stir Welding on Microstructure of 7075 Aluminium. *Scripta Mater.*, 36: 69–75
- [50] M.W. Mahoney, C.G. Rhodes, J.G. Flintoff, R.A. Spurling, and W.H. Bingel. 1998. Properties of Friction Stir Welded 7075 T651 Aluminum. *Metall. Mater. Trans. A*, 29: 1955–1964
- [51] Y.S. Sato, H. Kokawa, M. Enomoto, S. Jogan, and T. Hashimoto. 1991. Precipitation Sequence in Friction Stir Weld of 6063 Aluminum During Aging. *Metall. Mater. Trans. A*, 30: 3125–3130
- [52] P.L. Threadgill, A.J. Leonard, H.R. Shercliff, and P.J. Withers. 2009. Friction Stir Welding of Aluminium Alloys. *Int. Mater. Rev.*, 54: 49–93.
- [53] P.L. Threadgill. 2007. Terminology in Friction Stir welding. *Sci. Technol. Weld. Join.*, 12: 357–360
- [54] R. Nandan, T. DebRoy, and H.K.D.H. Bhadeshia. 2008. Recent Advances in Friction Stir Welding-Process. *Weldment Structure and Properties*, *Prog. Mater. Sci.*, 53: 980–1023.
- [55] G. Campbell and T. Stotler. 1999. Friction Stir Welding of Armor Grade Aluminum Plate. *Weld. J.*, 78: 45–47
- [56] H. Li, D. Mackenzie and R. Hamilton. 2010. Parametric finite-element studies on the effect of tool shape in friction stir welding. *Proc. Inst. Mech. Eng. B: J. Eng. Manuf.*, 224, (B8):1161–1173
- [57] A. Arora, A. De and T. DebRoy. 2011. Toward optimum friction stir welding tool shoulder diameter. *Scr. Mater.*, 64 (1): 9–12.
- [58] S. Hirasawa, H. Badarinarayan, K. Okamoto, T. Tomimura and T. Kawanami. 2010. Analysis of effect of tool geometry on plastic flow during friction stir spot welding using particle method. *J. Mater. Process. Technol.*, 210 (11): 1455–1463.
- [59] G. Madhusudhan and Suresh D. Meshram. 2011. Study Effect of Tool Rotation Speed and Tool pin Profile on AA 2014 Aluminium Alloy Friction Stir welds. *Proceedings of the IIW International conference on Global Trends in Joining, Cutting and Surfacing Technology*, Chennai Trade Centre, Chennai, India.
- [60] Hakan Aydın, Ali Bayram and Ismail Durgun. 2010. The effect of post weld heat treatment on the mechanical properties of 2024-T4 friction stir welded joints. *Materials and Design* 31: 2568–2577.
- [61] K. Elangovan and V. Balasubramanian. (2008). Influences of tool pin profile and welding speed on the formation of friction stir processing zone in AA2219 aluminium alloy. *Journal of materials processing technology*, Vol. 200:163–175.
- [62] G. Bussu and P.E. Irving. The Role of Residual Stress and Heat Affected Zone Properties on Fatigue Crack Propagation in Friction Stir Welded 2024-T351 Aluminum Joints. *Int. J. Fatigue*, Vol. 25: 77–88.
- [63] A. C. S. Kumar, Indira Rani M and Marpu R. N. 2011. A study of process parameters of friction stir welded AA 6061 aluminium alloy in O and T6 conditions. *ARPN Journal of Engineering and Applied Sciences*, 6(2).
- [64] Vivekanandan. P, Arunachalam. V. P, Prakash. T and Savadamuthu. L. 2012. The experimental analysis of friction stir welding on aluminium composites. *International Journal of Metallurgical Engineering*, 1(4): 60-65.
- [65] M. Abbasi-Gharacheh, A.H. Kokabi, G.H. Daneshi, B. Shalchi and R. Sarrafi. The influence of the ratio of “rotational speed/traverse speed” ( $\omega/v$ ) on mechanical properties of AZ31 friction stir welds. *International Journal of Machine Tools & Manufacture*, 46: 1983–1987.
- [66] A. Kumar, S. Ugender, A. Somi Reddy and A. Devaraju. Influence of process parameters on mechanical properties of friction stir welded AA 6061-T6 alloy and Mg AZ31B alloy. *International Journal of Applied Research in Mechanical Engineering (IJARME)* ISSN, 3: 2231 –5950.

- [67] Prashant Prakash, Sanjay Kumar Jha and Shree Prakash Lal.2013.A study of process parameters on friction stir welded AA 6061 aluminium alloy. International journal of innovative research in science, engineering and technology 2: 2304-2309.
- [68] S. Rajakumar, C. Muralidharan and V. Balasubramanian.2013.Influence of friction stir welding process and tool parameters on strength properties of AA7075-T6 aluminium alloy joints. Materials and Design.
- [69] Patil H S and S. N. Soman.2010.Experimental study on the effect of welding speed and tool pin profiles on AA6082-O aluminium friction stir welded butt joints. International Journal of Engineering, Science and Technology, 2(5): 268-275.
- [70] P. Cavaliere, A. Squillace and F. Panella.2008.Effect of welding parameters on mechanical and microstructural properties of AA6082 joints produced by friction stir welding. Journal of materials processing technology, 200:364–372.
- [71] Binnur Goren Kiral, Mustafa Tabanoglu and H. Tarik Serindag.2013.Finite Element Modeling of friction stir welding in aluminium alloys joint. Mathematical and computational applications, 18(2): 122-131.
- [72] Dr. Ayad M. Takhakh and Asmaa M. Abdullah.2012.The Optimization Conditions of Friction Stir Welding (FSW) for Different Rotational and Weld speeds. Nahrain University, College of Engineering Journal (NUCEJ), 15 (2):187– 196.
- [73] P.Bahemmat, A.Rahbari, M.Haghpanahi and M.K.Besharati.2008. Experimental study on the effect of rotational speed and tool pin profile on aa2024 aluminium friction stir welded butt joints. Proceedings of ECTC ASME Early Career Technical Conference, Miami, Florida, USA.
- [74] Rajakumar S, Muralidharan C and Balasubramanian V. 2010. Optimization of the friction stir welding process and tool parameters to attain a maximum tensile strength of AA7075-T6 aluminum alloy. Proc. IMechE Part B: J. Engineering Manufacture, 224:1175-1190.
- [75] Su JQ, Nelson TW, Mishra R and Mahoney MW.2003. Microstructural investigation of friction stir welded 7050-T651 alloy. Acta Mat., 51:713-729.
- [76] Leal RM, Leitao C, Loureiro A, Rodrigues DM and Vilac P.2008.Material flow in heterogeneous friction stir welding of thin aluminium sheets: Effect of shoulder geometry. Materials Science and Engineering, 498:384-391.
- [77] H. K. Mohanty, M. M. Mahapatra, P. Kumar, P. Biswas and N. R. Mandal.2012. Effect of Tool Shoulder and Pin Probe Profiles on friction Stirred Aluminum Welds – a Comparative Study, J. Marine Sci. Appl, DOI: 10.1007/s11804-012-1123-411: 200-207.
- [78] Prince Saini, S.P.Tayal, Anish Kumar and Vikrant Kaushik.2013.Experimental Study of Hardness by Friction Stir Welding of 6061-T6 Aluminium Pieces. International Journal of Current Engineering and Technology, 3(3) ISSN 2277 – 4106.
- [79] Kulekci Mustafa Kemal ,Sic Ayudin,kalucErdinc.2008. Effects of tool rotation and pin diameter on fatigue properties of friction stir welded lap joints. Int J AdvManufTechnol ,36:877
- [80] Gopalakrishnan S.and Murugan N.2011.Prediction of tensile strength of friction stir welded aluminium matrix TiCp particulate reinforced composite. Materials and Design, 32: 462–467.
- [81] Sharma, Chaitanya , Dwivedi, Dheerendra Kumar and Pradeep Kumar.2012.Effect of welding parameters on microstructure and mechanical properties of friction stir welded joints of AA7039 aluminum alloy. Materials and Design, 36: 379–390.
- [82] Grover, Harinder, Tripathi, Himanshu and Sharma, Raman .2011.Experimental study of fsw process parameters on tensile strength of the al-si alloy.IJAE/Vol.II/ Issue III:164-17.
- [83] D. Venkateswarlu, N.R. Mandal, M. M. Mahapatra and S. P. Harsh.Tool Design Effects for FSW of AA7039. Welding Journal, Vol. 92.
- [84] G. Elatharasan and V.S. Senthil Kumar.2013.An experimental analysis and optimization of process parameter on friction stir welding of AA 6061-T6 aluminum alloy using RSM. Procedia Engineering, 64:1227 – 1234.
- [85] J.F.Guo, H.C.Chen, C.N.Sun, G.Bi,Z.Sun, J.Wei, “Friction stir welding of dissimilar materials between AA6061 andAA7075Al alloys effects of process parameters”, Materials and Design 56(2014),185-192.
- [86] K.V.P.P Chandu, E.Venkateswara Rao, A.Srinivasa Rao and B.V.Subrahmanyam.2014.The Strength of Friction Stir Welded Aluminium Alloy 6061. IJRMET 4(1):119-122.
- [87] V.L. Srinivas, M. Zammerudhin, M. Ravi Kumar, B. Ravi Sankar and K. Ravindra.2013.Parametric Analysis of Friction Stir Welding on AA6061 Aluminium Alloy. IJMERE ISSN No. 2249-0019, 3(5) : 557-564.
- [88] Subham Kumar, Vipin Kumar, Gajendra Singh, Mohd. and Zaheer Khan Yusufzai.Friction Stir Welding of Aluminium.College of Engineering, Teerthanker Mahaveer University. 2nd International Conference on Emerging Trends in Engineering & Technology.
- [89] Deepati Anil Kumar, Pankaj Biswas, Sujoy Tikader, M. M. Mahapatra and N. R. Mandal.2013.A Study on Friction Stir Welding of 12mm Thick Aluminium Alloy Plates. J. Marine Sci. Appl, DOI: 10.1007/s11804-013-1221-y, 12: 493-499.
- [90] P.Janaki Ramulu, R.GaneshNarayanan, SatishV.Kailas and Jayachandra Reddy.2013.Internal defect and process parameter analysis. Int J AdvManufTechnol–1528. DOI10.1007/s00170-012-4276-z, 65:1515.
- [91] A.M. Khorsid, A.A. Moustafa, and I. Sabry.Investigation of the mechanical properties of Friction Stir Welded 6061 Al plates. Prof. Dr. Production Eng., Faculty of Eng., Tanta University, ARE.
- [92] Lim, S., Kim, S., Lee, C. G., and Kim, S. J.2004.Tensile behavior of friction-stir-welded Al 6061-T651 Metall. Mater. Trans. A, Phys. Metall. Mater. Sci., 35: 2829–2835.
- [93] Shashi Prakash Dwivedi.2014.Effect of process parameters on tensile strength of friction stir welding A356/C355 aluminium alloys joint. Journal of Mechanical Science and Technology 28 (1): 285~291, DOI 10.1007/s12206-013-0967-0.
- [94] Rajakumar, S., Muralidharan, C., and Balasubramanian, V. 2010.Optimization of the friction stir welding process and tool parameters to attain a maximum tensile strength of AA7075-T6 aluminium alloy. Proc. I Mech E, Part B: J. Engg Mf, 224(8): 1175–1191.



- [95] T Sakthivel, G S Senegar and J Mukhopadhyay.2008.Effect of Welding Speed on Micro-structure and Mechanical Properties of Friction-stir Welded Aluminum. International Journal of Advanced Manufacturing Technology, DOI 10.1007/s00170-008-1727-7.
- [96] Wang Deqing and Liu Shuhua.2004.Study of Friction stir welding of aluminum. Journal of Materials Science, 39 : 1689 – 1693
- [97] J. Adamowski and M Szkodo.2007. Friction stir welds (FSW) of Aluminum alloy AW6082- T6. Journal of Achievements in materials and Manufacturing Engineering, 20, Issue 1-2.
- [98] D M Rodrigues, A Loureiro, C Leitao, R M Leal, B M Chaparro and P Vilaca.2008.Influence of Friction Stir Welding Parameters on the Micro-structural and Mechanical properties of AA 6016-T4 Thin Welds.Journals for Materials and Design, DOI 10.1016/j. matdes .2008.09.016.
- [99] P Biswas, D A Kumar, and N R Mandal.2011.Friction stir welding of aluminum alloy with varying tool geometry and process parameters. Proc. IMechE ,Vol. 226 Part B: J. Engineering Manufacture- DOI: 10.1177/0954405411424111:641-848.
- [100]Biswajit Parida, Sukhmay Pal,Pankaj Biswas, M M Mohapatra and Sujoy Tikader.2011. Mechanical and Micro-structural Study of Friction Stir Welding of Al-alloy.International. Journal of Applied Research In Mechanical Engineering (IJARME), ISSN: 2231 –5950
- [101]K. Krasnowski, C. Hamilton and S. Dymek.2015.Influence of the tool shape and weld configuration on microstructure and mechanical properties of the Al 6082 alloy FSW joints. Archives of Civil and Mechanical Engineering 15 : 133- 144.
- [102]Pasquale Cavaliere.2013. Friction stir welding of Al alloys: analysis of processing parameters affecting mechanical behavior. Procedia CIRP 11: 139 – 144.
- [103]S. Sree Sabari, S. Malarvizhi and V. Balasubramanian.2016.Characteristics of FSW and UWFSW joints of AA2519-T87 aluminium alloy: Effect of tool rotation. Journal of Manufacturing Processes 22: 278–289
- [104]S Gopi and K Manonmani.2013.Microstructure and mechanical properties of friction stir welded 6082-T6 aluminium alloy.,AustrelianJornal of Mechanical Engineering, 11(2):131-138.
- [105]Jassim Mohammed Salman AL-Murshdy and Qabas Khalid NajiChabuk.2016. Effect of tool shape geometry and rotation speed in friction stir welding of 2024-T3, The Iraqui Journal for Mechanical and Material Engineering, 16(3):176-185.
- [106]Dharia Pratp Singh, Vikram Singh and Sudhir Kumar.2016.Optimization of process parameters for friction stir welded AA7075-SIC composite joints by tauguchi method .YMCAUST Interntional Journal of Research, 4(I).
- [107]Vikrant Kaushik and Harpreet Sing.2014.Optimization of Mechanical Properties in Friction Stir Welding by using Taguchi Method. International Journal of Engineering Research & Technology, 3 (11).
- [108]S.K.Aditya and Abhijat Datta.2015.Analysis of Friction Stir Welding of Aluminium Alloys and Optimization of Welding Parameters for Maximum Tensile Strength.International Journal of Engineering Research and Applications, 5 (5) :36-43
- [109]Shaikh Mohammed Shakil and Yagnesh B. Chauhan.2015. Optimization of Friction Stir Welding Process Parameters for Welding Aluminium Alloys. International Journal of Science Technology & Engineering, 2 (2): 69-75.