

INVESTIGATION OF MECHANICAL PROPERTIES OF MMC OF ALUMINIUM ALLOY REINFORCED WITH BORON CARBIDE

Pardeep Kumar¹, Sagar Gupta², Kanyalal Gupta³, Shivtej Mohite⁴, Dinesh Mengal⁵

Assistant Professor¹, Students^{2,3,4,5}

Department of Mechanical Engineering,

ARMIET, Thane

Maharashtra – 421601

Abstract: Aluminium matrix composites (AMCs) have gained importance in various industries because of their good properties such as wear resistance, low density, high strength and good structural rigidity. Aluminium metal matrix composites are preferred in the field of aerospace, military, automobile, marine and many other domestic applications. The aluminium matrix can be strengthened by reinforcing with hard ceramics particles like SiC, Al₂O₃, B₄C, etc. in the present work aluminium LM6 alloy was chosen as matrix material and boron carbide particulate of 25 microns size is chosen as the reinforcement with varying weight percentages. The composite is prepared by using sand casting techniques. The hardness and the impact behavior of prepared composite were examined. Hardness of ALM6 was increased and impacted strength was decreased by addition of B₄C particles. Scanning electron microscopy (SEM) micrographs reveal the uniform distribution of B₄C particle in aluminium alloy.

INTRODUCTION

This review focuses on the change in mechanical properties of various Al/B₄C composites fabricated by using sand casting method. A metal matrix composite (MMC) is composite material with at least two constituent parts, one being a metal, other material may be a different metal such as a ceramic or organic compound. Effect of B₄C reinforcement in different AL alloys on mechanical properties like hardness, tensile strength, percentage elongation, residual stress measurements are discussed in detail. For this purpose various reinforcement of B₄C with different weight percentage and different particle sizes are considered along with Al alloys. Aluminum MMC's are widely used in various applications because of their higher mechanical and physical properties when compared with their base Al alloy. Metal matrix composites (MMCS) have emerged as an important class of materials for structural, wear, thermal, transportation and electrical applications.

Composite materials can be defined as the structures made up of two or more distinct parts. The starting materials can be organic, metals or ceramics. The components of composite materials do not occur naturally as an alloy, but are separately manufactured before these are combined together mechanically. The matrix is the monolithic material into which the reinforcement is embedded, and is completely continuous. This means that there is a path through the matrix to any point in the material, unlike two materials sandwiched together. In structural applications, the matrix is usually a lighter metal such as aluminium, magnesium, or titanium, and provides a compliant support for the reinforcement. In high-temperature applications, cobalt and cobalt-nickel alloy matrices are common. The reinforcement material is embedded into a matrix. The reinforcement does not always serve a purely structural task (reinforcing the compound), but is also used to change properties such as wear resistance, friction coefficient, or thermal conductivity.

LITERATURE SURVEY


1. Emamy et al – Fabricated the nano composite of AA 2024 aluminium alloy matrix reinforced with different volume fraction of nanometer MoSi₂ inter-metallic particles ranging from 0 to 5% by using mechanical alloying techniques. For comparison, samples without reinforcing particles and mechanical alloying and a sample with micro metric MoSi₂ particles were also synthesized. The prepared composite powder was consolidated cold and hot pressing and then heat treated to solution and aged condition (T6).
2. Celis et al - Studied the tribological behavior of sintered aluminium metal matrix composite containing various volume fractions of particles made of complex metallic alloy (CMA) was investigated in a reciprocating dry sliding ambient air against 10 mm diameter Al₂O₃ balls. The Al based MMC tested contained either 15 micro meter size AlCuFeB or 25 micro meter size AlCuFeCr particles. An improvement in dry sliding wear resistance of aluminium was achieved by incorporation of these CMA particles acting as 2nd phase reinforcement.
3. Suresha et.al. – Studied the effect of % reinforcement; load, sliding speed and sliding distance on stir Cast Al-SiC-Gr hybrid composites, Al-Gr and Al-sic composites. Parametric studies indicate that the wear of hybrid composites has a tendency to increase beyond % reinforcement of 7.5% as its values are 0.242g, 0.0228g and 0.0234g respectively at 3%, 7.5% and 10% reinforcement.
4. Vencl et. al. – Examined and compared the structural, mechanical and tribological properties of heat treated particulate composite of A356 aluminium alloy as a matrix reinforced with ceramic particles (Al₂O₃, SiC) and graphite particles. Composites are prepared by composite casting process.
5. Raina et al. - studied the hardness of stir and centrifugally cast Al- B₄C functionally graded metal matrix composite with graded distribution of B₄C particles near the outer periphery of casting. Studied show that maximum of 45 and 40% B₄C particles are obtained near the outer periphery of Al (356)- B₄C and Al (2124)- B₄C FGMMC casting respectively.

OBJECTIVES

1. The objective of this work is to investigate the effect of B₄C particle reinforcement on the mechanical behavior of AL LM-6 alloy. The composites with 2.5, 5 & 7.5 wt% of B₄C composite will be produced by the sand casting procedure with some special techniques. Structural, mechanical, tribological, thermal, chemical characteristics properties of alloy and composites will be studied on the basis of comparison of property best combination of reinforcement will be found out.
2. In this paper, the mechanical properties of the aluminium alloy will be checked when there is reinforcement of boron carbide by using furnaces. After reinforcing, the mechanical properties of the material will be identified by using universal testing machine, hardness testing machine.

EXPERIMENTAL PROCEDURE:-

FLOW CHART

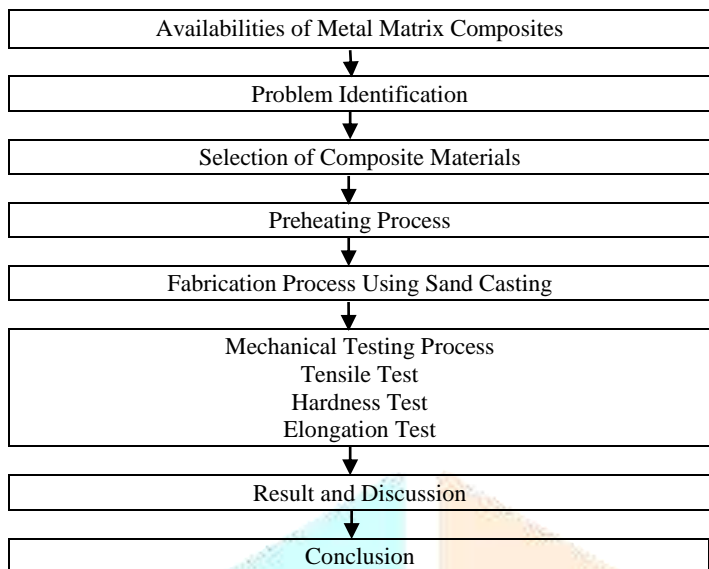

SAND CASTING:-

Sand casting, also known as sand molded casting, is a metal casting process characteristic using sand as the mold material. The term "sand casting" can also refer to an object produced via the sand casting process. Sand casting produce in specialized factories called foundries. Over 70% of metal casting produces via sand casting.



Fig.1- Furnace



Fig.2-



Fig.3- Moulding

Sand casting, also known as sand molded casting, is a metal casting process characteristic by using sand as the mold material. The term "sand casting" can also refer to an object produced via the sand casting process. Sand castings are produced in specialized factories called foundries. Over 70% of all metal castings are produced via sand casting process.

Molds made of sand are relatively cheap, and sufficiently refractory even for steel foundry use. In addition to the sand, a suitable bonding agent (usually clay) is mixed or occurs with the sand. The mixture is

moistened, typically with water, but sometimes with other substances, to develop the strength and plasticity of the clay and to make the aggregate suitable for molding. The sand is typically contained in a system of frames or mold boxes known as a flask. The mold cavities and gate system are created by compacting the sand around models called patterns, by carving directly into the sand, or by 3D printing.



Fig.4 - Sand Mixer



Fig.5 – sand casting mould



Fig.6 – Sand heating for fixed the sand properly

Table No. 1 – Chemical composition of Aluminium alloy (LM6)

Element	Cu	Mg	Si	Fe	Zn	Mn	Al
% by weight	0.068	0.069	11.62	0.39	0.10	0.069	Remainin g

Table No. 2 – Process parameter used for Sand Casting

Parameters	Units	Value
Temperature of Melt	°C	850
Preheating temperature of B ₄ C particles	°C	250
Preheating temperature of die	°C	600

There are six steps in this process:

1. Place a pattern in sand to create a mold.
2. Incorporate the pattern and sand in a gating system.
3. Remove the pattern.
4. Fill the mold cavity with molten metal.
5. Allow the metal to cool.
6. Break away the sand mold and remove the casting.

RESULTS AND DISCUSSION :-

In comparison with conventional polymer matrix composites, MMC are resistant to fire can operate in wider range of temperatures, do not absorb moisture, have better electrical and thermal conductivity, are resistant to radiation, do not display out gassing.

Strengthening of composite is due to dispersion strengthening and particle reinforcement.

For the results, we have done some tests are following:

- i. Tensile
- ii. Hardness
- iii. Elongation

TESTING RESULTS -

Table No. 3: Testing Results

Sample no.	Al (%)	B ₄ C (%)	Tensile Test (N/mm ²)	Hardness Test (HBW)	Elongation Test (%)
1	100	0	95.0	2.5/46.7	3.66
2	97.5	2.5	93.8	2.5/47.5	2.92
3	95	5	93.4	2.5/48.3	2.76
4	92.5	7.5	98.5	2.5/48.3	3.70

SPECIMAN SPECIFICATION :-

SAMPLE NO. 01

With 100% aluminium without boron carbide



SAMPLE NO. 02

With 97.5% aluminium combined with 2.5% boron carbide



SAMPLE NO. 03

With having 95% aluminium with 5% boron carbide



SAMPLE NO. 04

With 92.5 % aluminium having 7.5% boron carbide



CONCLUSION

The Aluminium LM6/B₄C composite where produced by the sand casting route with different weight percentage of reinforcement and the microstructure, mechanical properties were evaluated. From this study, the following conclusion are derived. The strength of the grain boundaries increases to maximum level and dislocation of the atom is decreased by increasing the weight percentage of reinforcement, which gives strength to the matrix and thereby hardness of the composite gets increased. The tensile strength is increased as the yeild strength is also increased. The B₄C reinforcement has reduced the impact strength of Aluminium Matrix Composite. It is observed that the toughness is decreased by increasing the weight percentage of the B₄C particles in the composite. This is due to the addition of B₄c in various percentages with Aluminium, The Brittleness of the material also increased. Because of high brittleness, the impact strength of the material is decreased.

REFERENCES

1. Madeva Nagaral, V Auradi, Ravishankar MK " Mechanical behavior of Aluminum 6061 alloy Reinforced with Al₂O₃ & Graphite particulate hybrid metal matrix composites" International Journal of Research in Engineering & Technology (IJRET), vol.1, issue2, July 2013, 193-198.

2. U.B. Gopala Krishna, K.V. Srinivas Rao and B. Vasudeva “Effect of boron carbide reinforcement on aluminum matrix composites” International Journal of metallurgical & materials science and engineering, vol.3, No.1, PP 41-48, 2013.
3. Sai Keerthi S.P, Vijayaramnath.B, Elanchezhian.C “Experimental Evaluation of the mechanical properties of aluminum 6061-B4C-SiC composites” International Journal of Engineering Research, Vol. No.3, issue No: special 1, PP: 7073.
4. S. RamaRao and G. Padmanaban, “Fabrication and mechanical properties of aluminum boron carbide composites” International Journal of materials and Biomaterials Applications, Vol.2, No.3, PP. 15-18; 2012.
5. Gopalakrishnan S, Muragan N, 2011. “Prediction of tensile strength of friction stir welded aluminum matrix TiCp particulate reinforced composite”, Mater Des, 32, 462.
6. Hashim J, Looney L, Hashimi M.S.J, 2002. “Particulate distribution in cast metal matrix composites, Part-I”, J. Mater. Process. Technol. 123, 251.
7. Hashim J, Looney L, Hashimi M.S.J, 2002. “Particulate distribution in cast metal matrix composites, Part-II”, J. Mater. Process. Technol. 123, 258.
8. Hashim J, Looney L, Hashimi M.S.J, 1999. “Metal matrix composites: produced by stir cast method”, J. Mater. Process. Technol. 1-7, 92.
9. Kalaiselvan K, Murugan N, Siva Parameswaran , 2011. “Production and Characterization of 6061 Al-B4C stir cast composite”, Mater and Deign 32, 4004.
10. Kerti I, Toptan F, 2008. “Microstructural variation in cast B4C-reinforced aluminum matrix composites (AMCs)”, Mater Lett, 62, 1215.

