

To Experimental study various types of Aggregate for Development compressive strength and workability of concrete

Dr.Sanjeev Gill¹, Dr D.K. Maharaj², Dr.Rajiv Kumar³
¹HOD Civil Department JBIT, Dehradun, (U.K),
²Director and Principal GNIT Mullana, Ambala, Haryana
³Associate Professor, N.C.C.E, Panipat (HRY)

ABSTRACT: the aim of study various types of aggregate to take higher ultimate compressive strength and workable of concrete. the different types of aggregate and this imparts different properties to the resulting concrete. the most important properties of concrete is its compressive strength and workability. workability of concrete is defined effort required to manipulate a freshly mixed quantity of concrete with minimum loss of homogeneity. the work focused on concrete mixes having different types of water –cement ratio. fine aggregate for different water –cement ratio based on trial mixes. This trial indicate if the concrete face produce honey –comp the mix having water-cement ratio less than 0.45 so increase water-cement ratio to get more strength and workable concrete. the workability and compressive strength test performed in this research. the experimental result for compressive strength and workability of concrete moderate by using different types water-cement ratio.

Keywords: workability, water-cement ratio, strength, aggregate, concrete, fine aggregate, coarse material, cement.

INTRODUCTION- The workability and compressive strength of concrete depends upon various factor such as ,water-cement ratio, shape of aggregate, grading of aggregate ,size of aggregate .water serves two function in a concrete mix. Firstly ,it enable chemical reactions which cause setting and hardening to proceed and secondly it lubricates the mixture of gravel, sand cement in order to facilitate placing. concrete can be visualized as a multi-phase composite material made up of three phase namely the mortar ,aggregate interface, and the coarse aggregate phase .the coarse aggregate in normal concrete are mainly from rock fragments characterized by high strength .the concrete can be compacted with specified effort forth coming at the site work. the lubrication required for handing concrete without segregation ,for placing without loss of homogeneity, for compacting with the amount of efforts fourth coming and to finish it sufficiently easily the presence of a certain quantity of water is vital .in this study ,the quality and grading of aggregate in all the mixtures were the same. the main object of this research was to find the workability and strength of concrete .

Concrete material and their chemical and physical properties

Cement
Sand
Coarse aggregate
Admixtures

CEMENT- the product manufactured by burining and crushing to powder on intimate and well proportioned mixture of calcareous and argillaceous material is called cement. this important building material was first introduced in year 1824 by joseph aspedin, a brick layer of leads in England he discovered that a mixture of slaked lime and clay whwn heated to high temp and crushed to powder could produce a binding material which would harden in the presence of water .this binding material was named as Portland cement.

Raw material OF cement



Calcareous material
Argillaceous material

Calcareous material- the material which contain calcium or lime as their major constitute are known as calcareous material such. Lime stone ,marl, shells etc.

Argillaceous material- the material which contain alumina as their major constitute are known as argillaceous material s such as shale, iron oxide ,magnesium oxide.

Chemical composition of cement

a) Abbreviation:




Thus we can write $3 \text{CaO} = \text{C}_3$ and $2 \text{CaO} \cdot \text{SiO}_2 = \text{C}_2\text{S}$.


b) Major compounds:

Compound	Oxide composition	colour	Common name	Weight percentage
Tricalcium				
Silicate	C_3S	white	Alite	50%
Dicalcium				
Silicate	C_2S	white	Belite	25%
Tricalcium				
Aluminate	C_3A	white/grey	---	12%
Tetracalcium				
Alumino ferrite	C_4AF	black	Ferrite	8%

Since the primary constituents of Portland cement are calcium silicate, we can define Portland cement as a material which combine CaO and SiO_2 in such a proportion that the resulting calcium silicate will react with water at room temperature and under normal pressure.

Hydration of cement –the chemical reaction between cement and water is known as hydration of cement. this chemical reaction takes place between final compounds of cement i.e tricalcium silicate, dicalcium silicate alumina ferrite and tetra calcium alumina ferrite and water. during hydration of cement, calcium aluminate react first with water as compared to tricalcium silicate aluminate, hydrated calcium silicate then breaks down to form dicalcium silicate and release the excess lime as calcium hydroxide then the latter precipitates out in the form of crystal of super saturated solution. then both the dicalcium silicate, as originally present and that resulting from hydrolysis, breaking down of C_3S as stated above, combine directly with water in a process known as hydration and form hydrated calcium silicate. thus owing to high solubility of aluminates in plain water, tricalcium aluminate crystals which are responsible for initial setting of cement. C_3S reacts slowly then C_3A but faster then C_2S . the development of firstly 28 days strength is on account of the hydration of C_3S where as C_2S reacts slowly and takes 2 to 3 year for its complete hydrated and contributes towards ultimate strength of concrete. all these properties of different compounds of cement are illustrated graphically

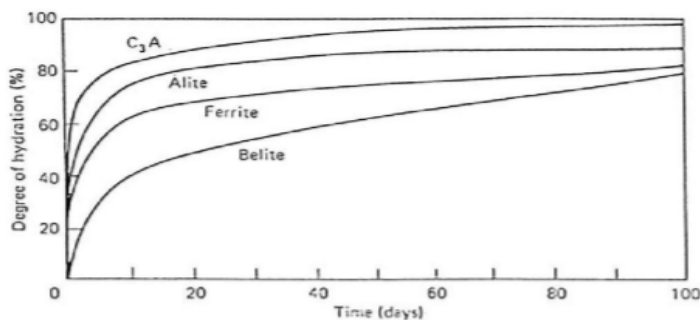

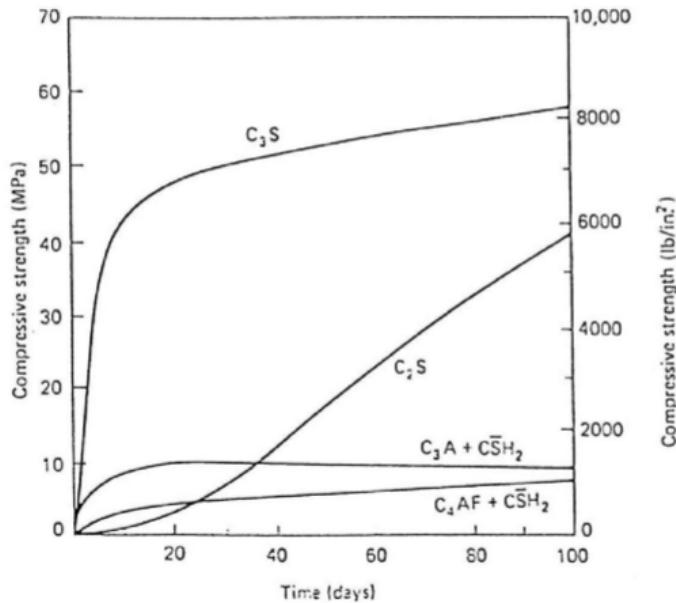

Types of cement

- Ordinary Portland cement
- Rapid hardening cement
- Low heat cement
- Blast furnace slag cement
- Sulphate resistant cement
- Air entraining cement
- Coloured cement
- High alumina cement
- Oil well cement

Test on cement

- Fineness test
- Soundness
- Setting time test
- Compressive strength test

Aggregate -Aggregate is the broad category of basic material used in Construction, including sand gravel, crushed stone ,slag saw dust, broken bricks etc. its constitutes about 85 % of the volume of concrete .they are chemically inert and forms of mortar and concrete when mixed with cement .aggregates do not take part in the various chemical reaction taking place in concrete during setting and hardening of concrete ,thus they are called inert materials. the aggregate are generally used to increase the volume of concrete .they are economical and cheaper than cement .

Source of Aggregate

- Almost all natural aggregate materials originate from bed rocks .
- there are three kind of rocks
- Igneous rock
 - Sedimentary rock
 - Metamorphic rock

Classification of aggregate

various aggregate being used for manufacture of concrete are classified.

- According to source
- According to size
- According to shape

According to source

Classified into following two types

- Naturally occurring aggregate
- Artificial or processed aggregate

Naturally occurring aggregate - the aggregate obtained from natural deposits of sand and gravel or quarries by cutting rock are called naturally occurring aggregate. these aggregate should, their actual use specially while preparing concrete for reinforced concrete work

Artificial or processed aggregate- The aggregate obtained artificially by breaking brick or blast furnace slag into graded particles of required size are known as artificially occurring or processed aggregate. the most common artificial aggregate are broken brick and air cooled blast furnace slag. broken brick are commonly used for mass concrete works where as blast furnace slag is used for fire resisting concrete work.

Classification according to size-

According to size the aggregate are classified into the following three types

- Coarse aggregates
- Fine aggregate
- All-in- aggregate

Coarse aggregates- the aggregates which pass through 75mm I.S sieve and entirely retain on 4.75mm I.S sieve are known as coarse aggregate. the maximum particle size of coarse aggregate is 75mm and its minimum particle size is 4.75mm. The aggregate of particle size greater than 75mm is known as cyclopean aggregate. The size of coarse aggregate depends on the type of work and arrangement of reinforcement provided in the concrete

Fine aggregate -The aggregate which passing through 4.75mm I.S sieve and retain on 75 micron I.S sieved are known as fine aggregate the maximum particle size of coarse aggregate is 4.75mm and its minimum particle size is 0.075mm.(75micron).the material having particle size, varying from 0.006 to 0.002 mm termed as silt and that with particle less than 0.002mm is known as as clay. the commonly used fine aggregate are made naturally sand artificial sand. natural sand is obtained from nala beds, river beds and sea beds and is named accordingly viz, nala sand, river sand and sea sand. artificial is made crushing stone or gravels to powder.

All in aggregate- The aggregate containing a proportion of all size of aggregate is known as all-in-aggregate. this types of aggregate comprises of the material obtained from the pit, river bed, quarry or crushing plant in its original. this type of aggregate is used only from un-important works. for important works all-in -aggregate are sorted out into coarse and fine aggregate by sieving through the standard sieves (75mm, 4.75mm and 75micron I.S sieved) which are then graded so as to obtain a dense and strong concrete with less quantity of cement.

Classification according to shape-According to the shapes of their particles, aggregate are classified into the following type.

- Rounded aggregates
- Irregular aggregates
- Angular aggregates
- Flaky aggregate

Rounded aggregate -these aggregate have 33% to 35% voids. hence gives more workability. They require lesser amount of water-cement ratio. They are not considered for high strength concrete because of poor interlocking behaviour and weak bond strength.

Irregular aggregate - The aggregate of this shape in naturally irregular or partly shaped by attrition and has rounded edges. These aggregate have 35% to 37% voids. These will give lesser workability when compared to rounded aggregates.

Angular aggregate-the aggregate of this shape possesses well defined edges formed at the intersection of roughly planer faces. These aggregate have 38% to 41% voids. Hence gives less workability. They give 10-20% more compressive strength due to development of stronger aggregate-mortar bond. So, these are useful in high strength concrete manufacturing.

Flaky aggregate-The aggregate of this shape is usually angular and has small thickness as compared to its width or length. These aggregate have the highest percentage of voids.

Test on Aggregate

- Fineness modulus and grain size distribution.
- Abrasion test
- Workability of concrete
- Shape test/ frankness and elongation

- Impact test
- Compressive strength test
- Specific gravity
- Water absorption
- Bulk density and voids of aggregate
- Sieve analysis

Workability-the concrete is placed in the form works and compacted is termed as the workability of concrete .the concrete when used require a certain degree of workability, higher workability is required if the section are thin and heavily reinforced .the workability of concrete depends on the properties of various ingredients of concrete .

Factor affecting on workability –

- Water content
- Shape of aggregate
- Size of aggregate
- Grading of aggregate
- Surface texture of aggregate
- Porosity and absorption of aggregate
- Air entraining agents
- Temperature

Measurement of workability-the water –cement ratio is expressed workability of concrete mix measured by various methods

- Compaction factor test
- Slump test
- Flow test
- Vee bee consist meter test

Slump test of concrete

Grade of concrete ratio	Material (kg)			W/C	Quantity of water (Kg)
	Cement	sand	C.A		
M-15	2.86 (Kg)	5.71 (Kg)	11.42 (Kg)	04	1.15
				0.5	1.43
				0.6	1.71
M-20	3.64(Kg)	5.46 (Kg)	10.92 (Kg)	0.4	1.46
				0.5	1.82
				0.6	2.18
M-25	5 (K.g)	10 (Kg)	10 (Kg)	0.4	2
				0.5	2.5
				0.6	3

Recommended slup test value varies with the different concrete mixes

S.NO	CONCRETE MIXES	SLUMP RANGE IM MM
1	Column Retaining wall	75-150mm
2	Beam and Slab	50-100mm
3	CC Pavement	20-30mm
4	Vibrated Concrete	12-25mm
5	Deck of Bridge	30-75mm
6	Huge mass Construction	25-50mm

Conclusion

- Size and shape of aggregate also effect on the workability of concrete .smaller size aggregate offer grater surface area than larger size aggregate and thus more quantity of water for lubrication.
- Strength of concrete depends upon the water cement ratio.
- Highest compressive strength achieved from containing crushed aggregate, followed by concrete containing grading aggregate.
- The crushed aggregate may be employed for concrete work in places where concrete practitioners have variety of choices available.

- The concrete with any proportion of flaky and elongated aggregate replacing normal aggregate can produce workable concrete with acceptable strength.
- Use admixture increase the workability of concrete.
- The workability of concrete is also depends upon the temperature

References

- [1]. IS.10262-2009(first revision) ,concrete mix proportioning guideline
- [2]. International journal of latest research in engineering and computing, volume, 3issue 1, jan-feb-20015
- [3] j.m.khatib(2005).properties of concrete incorporating fine recycled aggregate, cement and concrete research ,vol;35,pp763-769
- [4]. concrete technology , New Age International Publishers
- [5]. hindawi publishing corporation ,journal of construction engineering vol,2016,article id 5089683,8pages
- [6]. R.k.Aggarwal, M.L.Ohri , concrete technology India publishing house
- [7] M.T.Hagan,H.B.Demuth,and applied regression analysis, wily interscience ,1998.
- [8]. IS; 12269-2013,ordinary Portland cement 53 grade-specification ,bureau of Indian standards ,new Delhi
- [9]. okamra H,and ouchi,Mself-compacting concrete.journal of advanced concrete technology 2003,vol.1pp5-15
- [10] .the European guideline for self compacting concrete may -2005
- [11] .International journal of advanced engineering research and studies vol.1 issue III/April-june, 2012/09-11
- [12] .Ijcirt vol.8, issue,10,oct,2017,pp1448-1455,

