



A Brief Review On Optimum Power Generation For Standalone Hybrid Renewable Systems

A. Das Mondal¹, N. Ali Khan²

¹Assistant Professor, Department of Electrical Engineering, Brainware University, Kolkata, India

²Assistant Professor, Department of Electrical Engineering, Aliah University, Kolkata, India

Abstract—With the rapid change in market of non-conventional sources, the importance of integrating one or many various combinations of renewable sources into a hybrid system has gained immense attraction. This combination of hybrid energy systems can get over from the various limitation like system reliability, source flexibility, fuel efficiency and cost effective. Over the decade, the primary concern is the arbitrary performance of solar cell and availability of source of wind. Sometimes wind can't be correlated with the dynamic load and unwanted due to its heavy flow. Solar source is not available during night time. A hybrid renewable energy system is often faced issues related to fluctuations and source availability. The parameters and random variables in a hybrid energy system needs an optimization to get optimum and economical power generation from the system. The study presents a review of optimization algorithms used for battery management system as well as optimum power generation from a suitable hybrid system.

Keywords: optimization algorithms, hybrid system, solar system, wind system, battery charging control.

1. INTRODUCTION

Day by day power consumption is increasing rapidly. This is the main purpose for which we need to use fossil fuel to get optimum power generation. Unfortunately, this is a very known fact that the fossil fuel will run out one day and carbon emissions from this fossil fuel makes the environment polluted. For overcoming this situation in future to generate power as per demand, we need to use renewable energy. But according to many researchers if we use renewable energy in integrated form then only it will be beneficial for us [1][2]. Since RESs are available in abundance without imposing any significant capital cost, its efficacy can be exploited to fulfill energy demands [3]. Surveys [36] reveal that till 2050 RESs would be capable of delivering almost 80% of the residential, commercial and industrial power demands. Being sporadic in nature RESs undergoes exceedingly high dynamism as per regional environmental conditions makes its implementation with micro-grid complicate [37]. Typically, the availability and feasibility of RESs differ as per geographical conditions. For instance, a geographical location with sufficient sun-light presence can be ideal for solar power, while oceanic coastal regions, mountains etc. can be suitable for wind-turbine based power generation [4]. Though, these RESs can be vital to serve energy demands, it may undergo significantly high dynamism due to exceedingly high geographical and weather conditions. Due to the nonlinear characteristics of load side, the overall energy management system will be hampered in Hybrid Renewable energy systems. As a result, optimum power generation cannot be achieved and overall infrastructure has sunk to ground level. Under these circumstances, we need to incorporate a great controlled system to manage the overall performance of the system.

This paper presents a short review on the metaheuristics optimization techniques used in hybrid non-conventional systems and an overview of commonly used algorithms for getting optimize power generation of hybrid energy systems. This review paper will be organized by Section 2 will discuss on strategies of metaheuristics algorithm. In section 3, hybrid renewable energy systems performing with metaheuristics algorithm will be discussed. In

section 4, design model of hybrid renewable systems. In section 5, the merits and demerits of hybrid systems with different metaheuristic algorithm will be discussed.

2. METAHEURISTIC OPTIMIZATION STRATEGIES

Undoubtedly, “Meta” use to specify that it higher level algorithm. Metaheuristic methods are using for solving different complex optimization problems. In all metaheuristic algorithms require initial solutions from which candidate solutions are formed. Then each solution is estimated and the algorithm find it's the best solution. When the algorithm reached to its meeting criterion then only get final result otherwise it will start again to find its best result from beginning. Here between exploration and the exploitation need proper balancing which the basic criteria to investigate the performance of metaheuristic. Researchers are trying to make appropriate balance between these two criteria of any optimization problem. Accurate balancing is required for getting desired value for the fitness function. [7]. Without proper balance any particular Method cannot achieve their goal to optimize any fitness function.

3. RES SYSTEMS: WITH METAHEURISTICS ALGORITHM

In [8] authors developed PV/WT based HRES model where Adaptive Neuro Fuzzy inference scheme (ANFIS) was used to perform EMS control and panel voltage estimation. Different micro grid parameters were used in [28] to design EMS control model for HRES power system. Authors focused on addressing non-linearity in power generation. A similar micro-grid parameters-based EMS control model was developed in [29] [30]. In [31] a meta-model architecture was developed for HRES EMS function. To perform cost-optimization, authors applied time-varying quadratic pricing of the energy (per equipment). Their model was primarily depending on a dispersed optimization scheme which was primarily developed by means of a two-level iterative mechanism, Gauss-Seidel decomposition with competitive game-theoretic mechanism. Authors in [32] developed a novel multi-objective EMS control model for grid-connected HRES. They derived a Time-of-use Demand Side Management program that eventually assisted EMS control by considering industrial load demand as decision variable. Authors in [33] focused on developing an electrical Energy Storage System (ESS) for hybrid energy battery-super capacitor storage system (HESS). Authors [7] developed an EMS control design using Model Predictive Controller (MPC) to be used for PV/WT RES system. To augment performance, authors applied two-phased optimization scheme; rolling optimization; and feedback intra-sample correction, where the first phase functions for scheduling power transmission based on forecasted pattern. It is then followed by rolling dispatch scheduling adjustment on the basis of an intra-sample feedback correction scheme that compensates the prediction error in the forecasted data. In [8] authors developed a dynamic power management scheme (PMS) for PV RES system with a proton exchange membrane fuel cell (FC) as the secondary power source. As battery they applied super-capacitor HESS. In their model, the proposed PMS unit generates current references for dc converter current controllers of the FC, the battery, and the super-capacitor. In their model, the mean and fluctuating power components were distinguished by means of a moving average filter and thus the dc-link voltage regulation was done under dynamic load and generation changes. In [9] authors developed a joint control scheme for photovoltaic-based dc grid system where SC was used as energy storage. Tahani et al. describe about the PV/wind/battery system optimization by using Flower Pollination Algorithm (FPA) and Simulated Annealing (SA) algorithm. this works is done on Effect of PV panel tilt angle. [38] Authors in this paper introduced Genetic algorithm for getting an optimum hybrid solar-wind system with battery banks. Here optimum sizing methods was developed for calculating system configuration with minimum cost. [10]. The authors have experimentally proven about the charging stability of batteries by applying a new hybrid algorithm genetic algorithm (GA)-based proportional integral (PI) controller with adaptive neuro-fuzzy inference system (ANFIS) on PV/Wind/Battery system. Here SOC is maintained satisfactorily [11]. The authors establish the truth that using PSO algorithm battery can give better dynamic performance. It's possible only for the faster convergence speed and accuracy of the optimization process [12].

4. DESIGN MODEL OF HYBRID RENEWABLE SYSTEMS:

Here, a block diagram of the hybrid system is shown in fig 1 on which all the optimization techniques applied. In fig 1 components of hybrid systems are solar cell, wind generator, battery, dc -dc converter and dc bus.


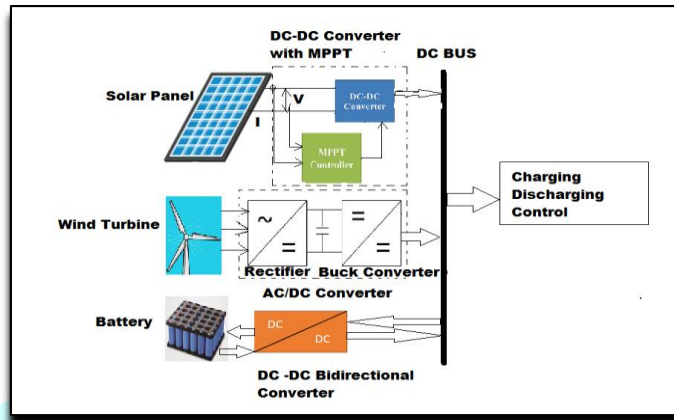


Fig.1 Block representation of hybrid systems

4.1. Solar Panel Power Assessment:

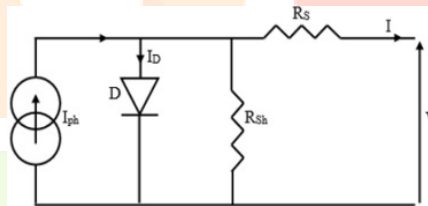

$$I = N_p [I_{ph} - I_{rs} [\exp \left(\frac{q(V + IR_s)}{AKTNS} \right) - 1]] \dots\dots\dots(1)$$

Where,

$$I_{rs} = I_{rr} \left(\frac{T}{T_r} \right)^3 \exp \left[\frac{E_G}{AK} \left(\frac{1}{T_r} - \frac{1}{T} \right) \right] \dots\dots\dots(2)$$

In equation 1, q is the electron charge (1.6×10^{-9} C), K is Boltzmann’s constant, A is the diode ideality factor, T is the cell temperature (K). I_{rs} is the cell reverse saturation current at T , T_r is the cell referred temperature, I_{rr} is the reverse saturation current at T_r , E_G is the band gap energy of the semiconductor used in the cell.

Objective function:

$$F(V, I) = I - I_{ph} - I_0 \exp \left(\frac{q(V + IR_s)}{AKTNS} \right) - 1 + \frac{(V + IR_s)}{R_{sh}} \dots\dots\dots(3)$$

4.2. Wind Potential Assessment:

The fundamental equation governing the mechanical power of the wind turbine is given by

$$P_{wind} = \frac{1}{2} KC_p \rho A s^3 \dots\dots\dots(4)$$

where ρ is air density (kg/m^3), C_p is power coefficient, A is intercepting area of the rotor blades (m^2), s is average wind speed (m/s). The theoretical maximum value of the power coefficient C_p is 0.593, also known as Betz’s coefficient.

The Tip Speed Ratio (TSR) for wind turbine is defined as the ratio of rotational speed of the tip of a blade to the wind velocity. Mathematically,

$$\lambda = \frac{r w_{tw}}{s} \dots\dots\dots (5)$$

where r is radius of turbine (m), w_{tw} is angular speed (rad/s), s is average wind speed (m/s).

The energy generated by wind can be obtained by

$$E_{wind} = P_{wind} * \text{time in kWh} \dots\dots\dots (6)$$

The objective of the optimization need to be defined for an optimization problem. Main key factors for finding the optimum size of components of hybrid systems are reducing cost with dependable and eco-friendly power supply. Mainly focused point for designing optimal systems are based on dependability, cost-effective, and eco-friendly [36].

5. MERITS AND DEMERITS OF USING DIFFERENT OPTIMIZATION ALGORITHMS IN HYBRID

OPTIMISATION TECHNIQUE	MERIT	DEMERITS	REFERENCE
PSO	Objective function is less dependent of the set of initial points. Convergence speed is fast	Requires large computational time	[22]
SA	Can use for non-linear models of finding an optimal solution easily	Initial assumption affects the final solution and also a no of constraints are needed.	[24]
GA	Can resolves problems with numerous solutions	Need sufficient initial population otherwise face difficulty to locate local minima	[14]
BPSO	Efficiently reduced the objective function iteratively to get optimum solution easily and it can be used in discrete domain	No of generation applied was fixed	[15]
FPA	Overall system outcome is that the order fulfillment cycle time is less	Choose proper parameters otherwise make problem to system sustainability	[17]

PSO-BPSO	Get best option for sizing of system	Components of the model selected directly from the manufacturer and pre sizing algorithm is required .	[18]
FPA-SA	increase the global search and check the algorithm to be confined in local optimum solutions.	a no of objective functions needed	[38]

Table:1

By using any above optimization techniques, it is possible to get maximize output power from the given hybrid systems. But for getting best result we have to consider proper algorithm and comparative study is also needed.

6. CONCLUSION

HRESs have been acknowledged as the greatest reasonable solution for the upcoming energy scenario. In this current scenario main aim of us to get maximum energy from these hybrid sources. This paper has reviewed various algorithms which are used for optimum output of the system. The literature review shows the different aspects of hybrid system under battery management system or sizing optimization. Here also showing the comparison between the different algorithms used for optimization process with their merits and demerits. In future, there is a lot of scope to work on the hybrid systems for further improvement in efficiency to assists reliable and quality power supply.

ACKNOWLEDGEMENT:

We would like to convey our gratitude to all the faculty members of Aliah University and Brainware University for their cooperation.

REFERENCE

- [1] G. Shafiullah, M. Amanullah, A. ShawkatAli, P. Wolfs, Smart Grid for a Sustainable Future, Smart Grid and Renewable Energy, Scientific Research, 2003, pp. 23-34.
- [2] S. Collier, "Ten steps to a smarter grid," IEEE Ind. Appl. Mag., vol. 16, no. 2, pp. 62–68, 2010.
- [3] J. A. Turner, "A realizable renewable energy future," Sci., vol. 285, no. 5428, pp. 687–689, 1999.
- [4] J. Carrasco, L. Franquelo, J. Bialasiewicz, E. Galvan, R. Guisado, M. Prats, J. Leon, and N. Moreno-Alfonso, "Power-electronic systems for thegrid integration of renewable energy sources: A survey," IEEE Trans. Ind. Electron., vol. 53, no. 4, pp. 1002–1016, 2006.
- [5] C. Blum and A. Roli, Metaheuristics in combinatorial optimization:Overview and conceptual comparison, ACM Computing Surveys (CSUR) 35(3) (2003), 268 308.
- [6] Merabet, K. Tawfique Ahmed, H. Ibrahim, R. Beguenane and A. M. Y. M. Ghias, "Energy Management and Control System for Laboratory Scale Microgrid Based Wind-PV-Battery," in IEEE Transactions on Sustainable Energy, vol. 8, no. 1, pp. 145-154, Jan. 2017.
- [7] M. S. Taha, H. H. Abdeltawab and Y. A. R. I. Mohamed, "An Online Energy Management System for a Grid-Connected Hybrid Energy Source," in *IEEE Journal of Emerging and Selected Topics in Power Electronics.*,
- [8] R. K. Sharma and S. Mishra, "Dynamic Power Management and Control of a PV PEM Fuel-Cell-Based Standalone ac/dc Microgrid Using Hybrid Energy Storage," in *IEEE Transactions on Industry Applications*, vol. 54, no. 1, pp. 526-538, Jan.-Feb. 2018.
- [9] U. Manandhar, N. R. Tummuru, S. K. Kollimalla, A. Ukil,G. H. Beng and K. Chaudhari, "Validation of Faster Joint

- Control Strategy for Battery-and Supercapacitor-Based Energy Storage System," in *IEEE Transactions on Industrial Electronics*, vol. 65, no. 4, pp. 3286-3295, April 2018.
- [10] Yang H., Zhou W., Lu L., Fang Z. Optimal sizing method for stand-alone hybrid solar– wind system with LPSP technology by using genetic algorithm. *Solar Energy* 2003; 82: 354–467.
- [11] Mohamed M. Ismail and Ahmed F. Bendary, "Optimal design of battery charge management controller for hybrid system PV/wind cell with storage battery: *Int. J. Power and Energy Conversion*, Vol. 11, No. 4, 2020.
- [12] Tiezhou Wu, Cuicui Zhou, Zhe Yan, Huigang Peng, Linzhang Wu, "Application of PID optimization control strategy based on particle swarm optimization (PSO) for battery charging system", *International Journal of Low-Carbon Technologies*, Volume 15, Issue 4, November 2020.
- [13] Jwo, W.-S., Liu, C.-W., Liu, C.-C., et al.: 'Hybrid expert system and simulated annealing approach to optimal reactive power planning', *IEE Proc., Gener. Transm. Distrib.*, 1995, 142, (4), pp. 381–385.
- [14] Feroldi, D., Zumoffen, D.: 'Sizing methodology for hybrid systems based on multiple renewable power sources integrated to the energy management strategy', *Int. J. Hydrog. Energy*, 201439, (16), pp. 8609–8620.
- [15] S B Shivakumar, Sampathkumar.V.Patil, "Optimization of Hybrid Renewable Energy System using BPSO-PID based Load sensitive EMS", *International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering*, Vol. 6, Issue 9, September 2017.
- [16] Clarke D.P., Al-Abdeli Y.M., Kothapalli G. Multi-objective optimization of renewable hybrid energy systems with desalination. *Energy* 2015; 88: 457–468.
- [17] Samy MM, et al., A flower pollination optimization algorithm for an off-grid PV-Fuel cell hybrid renewable system, *Journal of Hydrogen Energy* (2018), <https://doi.org/10.1016/j.ijhydene.2018.05.127>.
- [18] O. Llerena-Pizarro et.al, "A PSO-BPSO Technique for Hybrid Power Generation System Sizing", *IEEE Latin America Transactions*, vol. 18, no. 8, August 2020.
- [19] S. Diaf, D. Diaf, M. Belhamel, M. Haddadi, and A. Louche, "A methodology for optimal sizing of autonomous hybrid pv/wind system," *Energy Policy*, vol. 35, no. 11, pp. 5708-5718, 2007.
- [20] Tezer T, Yaman R, Yaman G (2017) Evaluation of approaches used for optimization of stand-alone hybrid renewable energy systems. *Renew Sustain Energy Rev* 73:840–853. <https://doi.org/10.1016/j.rser.2017.01.118>
- [21] Neto DP, Domingues EG, Coimbra AP, de Almeida AT, Alves AJ, Calixto WP (2017) Portfolio optimization of renewable energy assets: hydro, wind, and photovoltaic energy in the regulated market in Brazil. *Energy Econ* 64:238–250. <https://doi.org/10.1016/j.eneco.2017.03.020>
- [22] Lee, K. Y., Park, J.B.: 'Application of particle swarm optimization to economic dispatch problem: advantages and disadvantages'. *IEEE PES Power Systems Conf. and Exposition*, 2006, pp. 188– 192.
- [23] Thengade, A. and Dondal, R. (2012) 'Genetic algorithm – survey paper', *MPGI National Multi Conference*, April, pp.7–8.
- [24] Mougharbel, I; Shehab, Z.; Georges, S., "Simulation of a hybrid renewable energy system in rural regions," *IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society*, vol., no., pp.1150,1155,25-28 Oct. 2012.
- [25] Parita Dalwadi, V. Shrinet, C R Mehta, and Pankit Shah, "Optimization of Solar-Wind Hybrid System for Distributed Generation", *International Conference on current trends in Technology, NUICONE – 2011* 8-10, December, 2011.

- [26] K. Anoune, M. Bouya, M. Ghazouani, A. Astito and A. B. Abdellah, "Hybrid renewable energy system to maximize the electrical power production," *2016 International Renewable and Sustainable Energy Conference (IRSEC)*, 2016, pp. 533-539, doi:10.1109/IRSEC.2016.7983992.
- [27] N. Varghese and Reji P., "Battery charge controller for hybrid stand alone system using adaptive neuro fuzzy inference system," *2016 International Conference on Energy Efficient Technologies for Sustainability (ICEETS)*, Nagercoil, pp. 171-175, 2016.
- [28] Küçüker, T. Kamal, S. Z. Hassan, H. Li, G. MaazMufti and M. Waseem, "Design and control of photovoltaic/wind/battery based microgrid system," *2017 International Conference on Electrical Engineering (ICEE)*, Lahore, 2017, pp. 1-6.
- [29] Wei Deng, Xisheng Tang and Zhiping Qi, "Research on dynamic stability of hybrid wind/PV system based on Micro-Grid," *2008 International Conf. on Electrical Machines and Systems*, Wuhan, pp. 2627-2632, 2008.
- [30] Yuanrui Chen and Jie Wu, "Agent-based energy management and control of a grid-connected wind/solar hybrid power system," *2008 International Conf. on Electrical Machines and Systems*, Wuhan, pp. 2362-2365, 2008.
- [31] M. Zaibi, T. M. Layadi, G. Champenois, X. Roboam, B. Sareni and J. Belhadj, "A hybrid spline metamodel for Photovoltaic/Wind/Battery Energy Systems," *IREC2015 The Sixth International Renewable Energy Congress*, Sousse, 2015, pp. 1-6.
- [32] S. F. Phiri and K. Kusakana, "Demand Side Management of a grid connected PV-WT-Battery hybrid system," *2016 International Conference on the Industrial and Commercial Use of Energy (ICUE)*, Cape Town, 2016, pp. 45-51.
- [33] M. Bahloul and S. K. Khadem, "Design and control of energy storage system for enhanced frequency response grid service," *2018 IEEE International Conference on Industrial Technology (ICIT)*, Lyon, France, 2018, pp. 1189-1194.
- [34] P.Raja Sekhar , S.VenkatRao," Mitigation of the Wind Generation Integration Related Power Quality Issues by Energy Storage", *International Journal of Advanced Scientific Technologies, Engineering and Management Sciences (IJASTEMS-ISSN: 2454-356X)* Volume.3,Special, Issue.1,May.2017.
- [35] Fairuj Binte Faruque, Shuva Chowdhury, Md. Shahriar Nazim, Mycheal Sowmitra, A.K.M Abdul Malek Azad, "Optimized Distributed Generation Planning for Radial Distribution System Using Particle Swarm Optimization Algorithm", *2021 13th IEEE PES Asia Pacific Power & Energy Engineering Conference (APPEEC)*, pp.1-6, 2021.
- [36] "Exploration of High-Penetration Renewable Electricity Futures," Tech. Rep. National Renewable Energy Lab.,2012.
- [37] T.Wiedmann and J. Minx, "A Definition of 'Carbon Footprint'," Hauppauge, NY, USA: Nova Science, 2008.
- [38] Tahani M, Babayan N, Pouyaei A. Optimization of pv/wind/battery stand-alone system, using hybrid fpa/sa algorithm and cfd simulation, case study: Tehran. *Energy ConversManage.* 2015;106:644–659. doi: 10.1016/j.enconman.2015.10.011.