



DENSENET CONVOLUTIONAL NEURAL NETWORK APPLICATION FOR PREDICTION OF COVID-19 USING CT SCAN IMAGES

¹ Arifa Tadvi, ² Dr. Sudhir Sawarkar,

¹ PG Student, ² Principal

¹Computer Engineering Department

²Computer Engineering Department

¹Datta Meghe College of Engineering, Navi Mumbai, India

²Datta Meghe College of Engineering, Navi Mumbai, India

Abstract: Now days human health and lives are recently impacted by Coronavirus. Due to the unavailable proper vaccine of COVID-19 to control rather than cure, early and accurate detection of the virus can be a promising technique for tracking and preventing the infection spreading (e.g., by isolating the patients). This situation indicates to improve auxiliary COVID-19 detection technique. Computed tomography (CT) imaging is a mostly used technique for pneumonia because of its common availability. The application of DenseNet CNN systems integrated with images can be a promising alternative for the identification of COVID-19. This paper presents a promising technique of predicting COVID-19 patients from the CT image using convolutional neural networks (CNN). The novel approach is based on DenseNet is the updated CNN architecture in the present state to detect COVID-19. The results outperformed 89% accuracy, with 90% recall showing good performance for the identification of COVID- 19.

Index Terms – Covid-19, Deep Learning, DenseNet-121, CT-image.

I. INTRODUCTION

COVID-19 was first identified in late 2019 at Wuhan, China, and unexpectedly spread more than 200 countries; thus, the World Health Organization (WHO) announced as a pandemic crisis immediately [1]. Due to strong communicable properties among human-to-human in close contacts [2], healthcare professionals and policymakers have failed to control this dramatic pandemic outbreak, rapidly killing people[1]. As secondary infections occurred because of any close human contact in communities, it is crucial to identify and isolate the infected person at the earliest possible conditions and community isolation and social lockdown. Thus early detection of the COVID-19 virus is a paramount option to take proactive steps not only to minimize risks and to spread of infections but also to do the planning of clinical treatment and arrange timely care support. That may play a vital role in better public healthcare management. This may directly impact saving world from the causative virus.

Due to the unavailability of specific drugs and vaccines, there is a crucial need to identify the infected person for taking steps to immediate isolation. Because of the most quickly established laboratory diagnosis method worldwide, the real-time polymerase chain reaction (RT-PCR) analysis (as a vital diagnosis approach clinically) is generally adopted for the detection of COVID-19 virus in clinical practice, following the national recommendation for disease and treatment of pneumonia caused by the 2019- nCoV, started from China.

However, a defective rate of RT-PCR test results [3] might be contributing to any limitations leading to sample collection process and transportation, which involve a time-consuming procedure [4, 5]. This procedure might not recognize the infected person's (patient) conditions in critical situations, such as patients with intensive care unit (ICU). An infected person may be a carrier to spread the virus to other healthy or ordinary people as this virus (COVID-19) holds transmittable nature. Developing countries, however, suffer from limited scientific resources and a lack of health technologists or professionals [6]. Thus the alternative testing protocol represents a situational demand of the current pandemic environment with limited resources, which will be highly useful to fight against the COVID-19. Computed tomography (CT) imaging is a standard tool for the diagnosis of pneumonia. In this context, the CT image classification using CNN can be a promising alternative methodology for predicting COVID-19, especially for patients with ICU. Literature reveals that the performance of RT-PCR shows a lower sensitivity rate compared to the sensitivity of CT [7].

This research is mainly aimed to bring reliable measures to identify patients with COVID-19 from the CT image using CNN. CNN demonstrated excellent results in several computer vision tasks [8, 9]. CNN recently became a dominant in-depth learning approach for medical image classification due to its self-learning ability [10]. We applied a comparatively new approach, CNN, in which the learning technique is designed with an association of densely connected convolutional networks (DenseNet) [11] to identify people with COVID-19. The concept of driving DenseNet would be to link each layer to every other layer behind to improve the flow within the architecture. This helps CNN to settle based on all layers instead of one final layer. CNN's are more sophisticated and can capture image information on a larger scale compared to traditional image processing methods [9].

This study contributes to current literature in some aspects, which are summarized: First, we propose a newly adopted DenseNet technique to classify and identify COVID-19 patients. While RT-PCR test results might be contributing to any limitations for the critical patients, the CT image classification technique might be a promising alternative for the detection of COVID-19. Secondly, this study formulates the emergency patient decision-making issue. Thirdly, by using a real-time COVID-19 CT image data, the applied technique outperforms for identification of COVID-19 infection.

II. LITERATURE SURVEY AND BACKGROUND STUDY

With the rapid development of artificial intelligence, different image classification techniques in medical informatics have been proposed for various diversified demands. Recently, the ML technique has been considered as a prominent tool for the prediction and diagnosis of numerous diseases [12]. However, their accuracy and adequate performance criteria are yet to need improving. AlexNet, VGG, GoogLeNet, and ResNet, for example, are more performing in the classification of medical images. However, these networks are facing the difficulty of convergence, overfitting, and vanishing gradient problems [13]. Therefore, CNN, based on DenseNet, offers options for accurate medical image classification as itenables features [14].

Recently, radiology images have been widely used for the identification of COVID-19 cases using standard ML techniques. For example, Pereira, Bertolini [15] applied the hierarchical image classification using a chest X-ray for COVID-19 identification.

Ozturk, Talo [16] proposed a deep neural network for automatic detection of COVID-19 cases. Several strategies of deep learning were suggested for better identification of COVID-19.

Panwar, Gupta [17] proposed a deep learning-based nCOVnet technique for analyzing X-ray images, which achieved 88.10 % of overall accuracy.


Wang, Deng [19] implemented a weekly supervised deep learning framework using a 3D CT image. A noise-robust framework on CT image for automatic segmentation of COVID-19 was applied by Wang, Liu . Soares, Angelov [20] used an eXplainable Deep Learning approach using a CT image.

Ucar and Korkmaz [21] used Bayesian optimization additive fine-tuning for SqueezeNet that performs better COVID-19 detection. DenseNet, however, has used in the previous studies for obtaining higher accuracy of other domains like industrial image classification with prominent accuracy which is a more problem-sensitive network architecture and a multi-level innovative fine-tuning process that creates a number of specific networks.

The above discussion reveals that the DenseNet based CNN technique might be an alternative diagnostic tool for significant identification of COVID-19 disease identification using CT image. The CNN model may achieve significant promising results, but results can be improved by further use of new architectures.

Therefore the advance application of a CNN model for COVID-19 classification is the main motivation of this study.

III. PROPOSED ARCHITECTURE

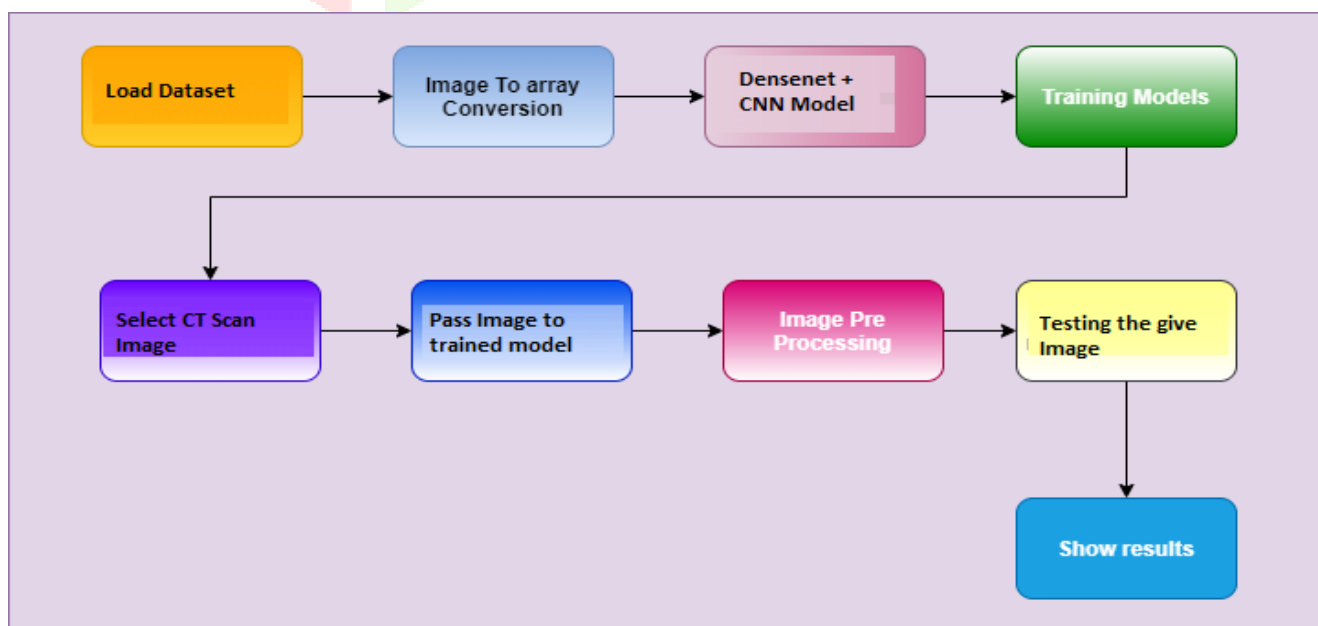

Figure(1): Block Diagram

In the proposed architecture, there are two datasets are used Covid image dataset and Non-covid image dataset.

First this architecture loads the image datasets. Then image is then converted into array[4x4]. Total 16 images are taken into the array at a time. We are using DenseNet and CNN(Convolutional Neural Network) for pre-processing the datasets and transformation of images. Training module is included in this architecture which will allow to select CT Scan image. This image is pass to trained model. In trained model , image pre-processing is done. After pre-processing Testing is performed on the given image. This will give the result into prediction.

DenseNET

DenseNet is modern architecture of CNN for visual object recognition that has acquired state-of-the-art with fewer parameters. With some principal modifications, DenseNet is very similar to ResNet. DenseNet, along with its concatenates (.) attributes, combines the previous layer output with a future layer while ResNet uses an additive attribute (+) to merges the previous layer with the future layers. Simply, the DenseNet Architecture aims to fix this problem by densely connecting all layers together. Among the different DenseNet (DenseNet-121, DenseNet-160, DenseNet-201), this study employed DenseNet-121 $[5+(6+12+24+16) \times 2]=121$ architecture. Details of the DenseNet-121 is following: 5- convolution and pooling layers, 3- transition layers (6,12,24), 1- Classification layer (16) and 2- denseblock (1x1 and 3x3conv).

Generally, traditional CNNs calculate the output layers (l^{th}) using a non-linear transformation $H_l(.)$ to the output of the previous layer X_{l-1}


$$X_l = H_l(X_{l-1}) \quad (1)$$

DenseNets don't really sum up the layer output functionality maps with the inputs but concatenate them. DenseNet offers an easy communication model for improving information flow between layers: the l^{th} layer receives inputs from the features of all previous levels: The equation is then again transformed into:

$$X_l = H_l([X_0, X_1, X_2, \dots, X_{l-1}]) \quad (2)$$

Where, $[X_0, X_1, X_2, \dots, X_{l-1}]$ is a single tensor formed by the concatenation of the output maps of previous layers. This function consists of three major operations, batch normalization (BN), activation (ReLU), and convolution (CONV). DenseNet architecture is presented in figure 1. However, the growth rate helps to generalize the l^{th} layer in following manner: $k^{[l]} = (k^{[0]} + k(l-1))$. Where $k^{[0]}$ is known as the number of channels of five years. The time series monthly data is collected on stock prices for sample firms and relative macroeconomic variables for the period of 5 years. The data collection period is ranging from January 2010 to Dec 2014. Monthly prices of KSE -100 Index is taken from yahoo finance.

Model Architecture Working

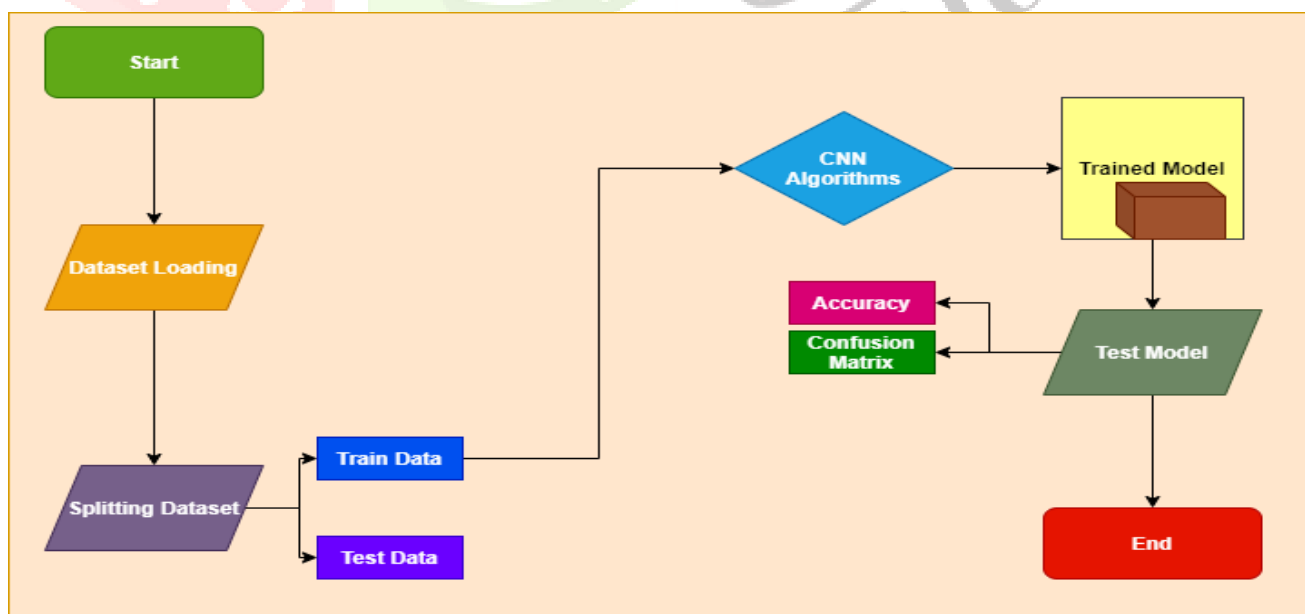

Figure(2): Model Architecture

In the proposed architecture, When the execution starts, it will first load the images dataset, The dataset is splitted into Train Data and Test Data. Train dataset will perform CNN Algorithm.

CNN or the convolutional neural network (CNN)

is a class of **deep learning neural networks**. In short think of CNN as a machine learning algorithm that can take in an input image, assign importance (learnable weights and biases) to various aspects/objects in the image, and be able to differentiate one from the other.

CNN works by extracting features from the images. Any CNN consists of the following:

1. The input layer which is a grayscale image.
2. The Output layer which is a binary or multi-class labels.
3. Hidden layers consisting of convolution layers, ReLU (rectified linear unit) layers, the pooling layers, and a fully connected Neural Network

CNN allow Trained model which will execute Test Model. Test model is calculated Accuracy and confusion Matrix of the images.

Step process for calculating a confusion Matrix in CNN:

- Step 1) First, you need to test dataset with its expected outcome values.
- Step 2) Predict all the rows in the test dataset.
- Step 3) Calculate the expected predictions and outcomes:
 1. The total of correct predictions of each class.
 2. The total of incorrect predictions of each class.

The confusion matrix visualizes the accuracy of a classifier by comparing the actual and predicted classes. The binary confusion matrix is composed of squares as shown in table1.

Augmentation

Data augmentation is a method that enables practitioners to significantly improve the variety of data for training models without actually collecting new data. Data augmentation techniques such as cropping, horizontal, rotation, etc. are a widely used method for training models. To increase training benefit and decreases the use of network regularization, image augmentation has used in this study. We adopted a widely employed data augmentation technique, which is also used in [13]. Images were in different pixelson each side and then randomly cropped to the 64×64 original image size, where the random rotation range was 360°. Images were mixed in horizontally and vertically mirrored. Horizontal, vertical, and zoomrange were sated into 0.2, which means that the range between height and weight is 0.8 to 1.2 (80% to 120%).

IV. RESEARCH METHODOLOGY

Data

To identify the COVID-19 using DenseNet architecture based CNN, a real patient image dataset[2] from ahospital from Sao Paulo, Brazil, was used in this study. Soares, Angelov [20] made this dataset publicly available to encourage further research development for the further stimulation of knowledge. There are 2482 CT images in total, while 1252 CT images were COVID-19 positive, and 1230 CT images were from non-infected by COVID-19 but who presented other pulmonary diseases. The images classes were labeled into two types: COVID and nonCOVID. Figure 3(a) & 3(b) represents a few instances of CT scans for patients infected and non-infected by COVID-19 that compose the dataset.

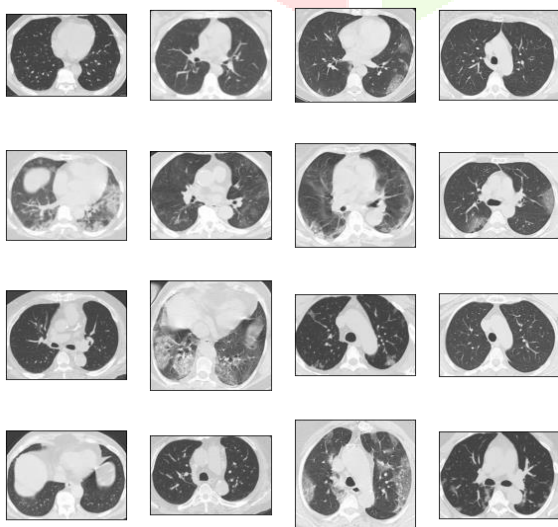


Figure3(a): Covid image dataset

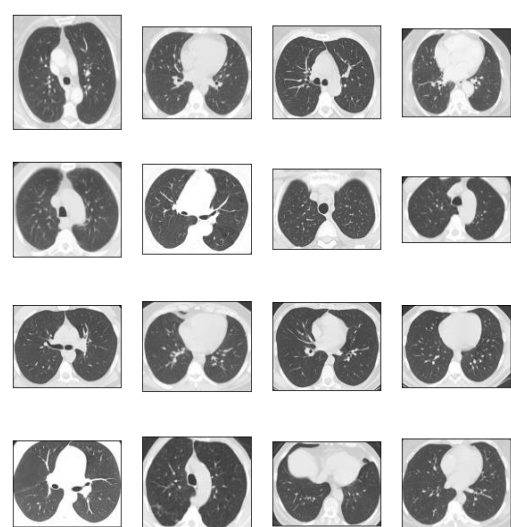


Figure3(b): Non-Covid image dataset

Pre-Processing

The objective of the image pre-processing stage is to smother unwanted twists present in the picture, resize and normalize the image for further processing. There is numerous image pre-processing technique found in the previous literature based on the requirement of model building. Among them, image resizing, image normalization, and covert level to categorical are generally used techniques. In this study, images were resized to ensuring the same size and the same pixel using the “Pillow 2.7+”[3] python package. This study considers 64×64 pixel values for images. Besides, image normalization is a process in which we adjust the pixel intensity to make the picture increasingly natural. Normally, most of the image pixel integrates the values between 0 to 255. But, due to the use of network architecture, it is better to perform all values between 0 to 1, which will be a good fit for the model building. This reduces the computational complexity during training the model. However, using Eq. (11), images were normalize

Where X_{min} and X_{max} refers to minimum and maximum pixel values.

$$X_{norm} = \frac{X - X_{min}}{X_{max} - X_{min}} \quad (11)$$

V. EXPERIMENTAL SETUP & PERFORMANCE MEASUREMENT

The proposed COVID-19 classification model was implemented using Python 3.7 software[4] with related packages. Intel(R) Core(TM) i5-8250U CPU @ 1.60 GHz processor with 16GB primary memory with 4-GB NVIDIA GeForce 940MX Graphics and 64-bit windows operating systems was used. COVID-19 patients' identification aims to determine if a patient is a COVID-19 infected or not. Before model building data was split into three part: training (70%), validation (10%) and testing (20%). The model history is presented in table 2 which was trained with 50 epochs. The DenseNet-121 code of COVID-19 detection is available at <https://github.com/shawon100/Covid-19-Disease-Diagnosis>. The outcomes of samples of each category correctly and incorrectly classified can be summarized as a confusion matrix, shown in Table 1. We can determine the accuracy based on the confusion matrix (Equation 12). The classification model's performance was calculated using four performance measurements: precision, recall, F1-measure, and G-Mean. Accuracy is the percentage of all instances that are correctly predicted.

Table 1: Confusion Matrix for COVID-19 Prediction

Actual	Predicated	
	Absence of COVID-19	Presence of COVID-19
Absence of COVID-19	True Positive(TP)	False Negative(FN)
Presence of COVID-19	False Positive(FP)	True Negative(TN)

Moreover, we implemented two metrics: F-measure, and G-Mean, along with accuracy, which is widely used for classification problems are as follows.

$$F_Measure = \frac{2 \times Precision \times Recall}{Precision + Recall} \quad (13)$$

$$GMean = \sqrt{\frac{TP}{TP+FP} \times \frac{TP}{TP+FN}} = \sqrt{Precision \times Recall} \quad (14)$$

Where F-measure is the weighted average of the precision and precision is the percentage of correct predictions for the positive class and recall is a measurement of how much a classifier can recognize positive examples. GMean aims to evaluate the two-class recall balance. The GMean value will be lower if the model is highly biased towards one class since this approach has become widely used in the classification problem. Thus, we used F-measure and GMean to assess the model's performance.

Table 2: Model Summary of CNN

Layer (type)	Output Shape	Param#
input_2 (InputLayer)	(None, 64, 64, 3)	0
conv2d_1 (Conv2D)	(None, 64, 64, 3)	84
densenet121 (Model)	Multiple	7037504
global_average_pooling2d_1	(None, 1024)	0
batch_normalization_1 (Batch)	(None, 1024)	4096
dropout_1 (Dropout)	(None, 1024)	0
dense_1 (Dense)	(None, 256)	262400
batch_normalization_2 (Batch)	(None, 256)	1024
dropout_2 (Dropout)	(None, 256)	0
root (Dense)	(None, 2)	514
Total params: 7,305,622 Trainable params: 7,219,414 Non-trainable params: 86,208		

VI. RESULT AND DISCUSSION

The DenseNet CNN model was trained to classify the CT images for 50 epochs. Each pre-trained model was trained on grayscale images. The model accuracy and loss graph of DenseNet CNN is shown in fig.4a and in fig. 4b.

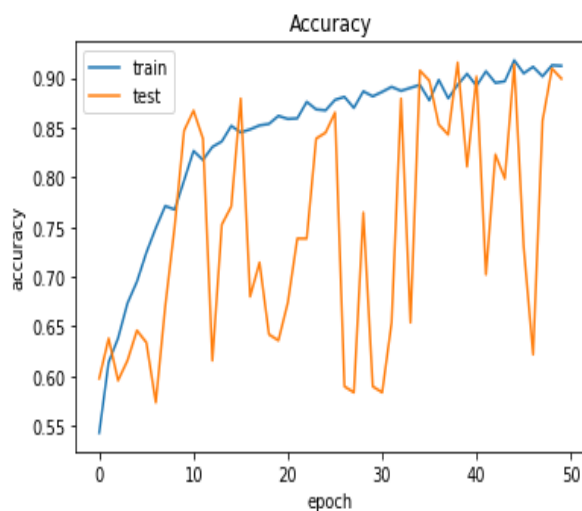


Fig.4(a): Accuracy

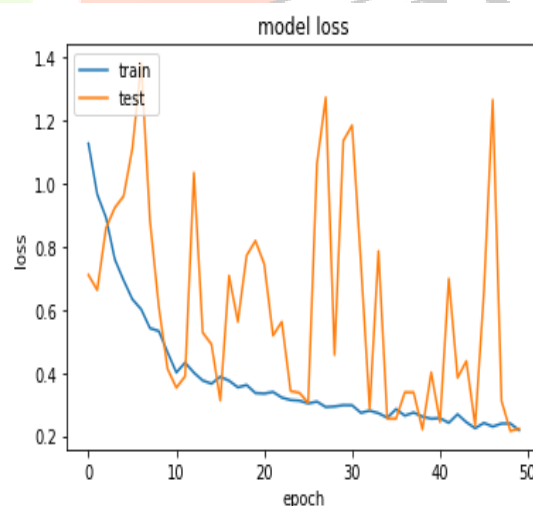



Fig.4(b): Model loss

The performance of DenseNet-121 was evaluated for grayscale test images. Table 3 shows the overall accuracy of the test data.

Table 3: The results obtained using DenseNet-121 on CT images

	precision	recall	f1-score	Gmean
NonCOVID-19	0.96	0.85	0.90	0.90
COVID-19	0.84	0.95	0.89	0.89
Overall Accuracy				0.89

From figure 5, it is identified that the DenseNet-121 model misclassified only 23 COVID-19 images out of 1252 images, and only 15 nonCOVID-19 images out of 1230 images. The precision, recall, f1-score, and Gmean values of DenseNet-121 using the grayscale test dataset are presented in table 4 for details performance analysis.

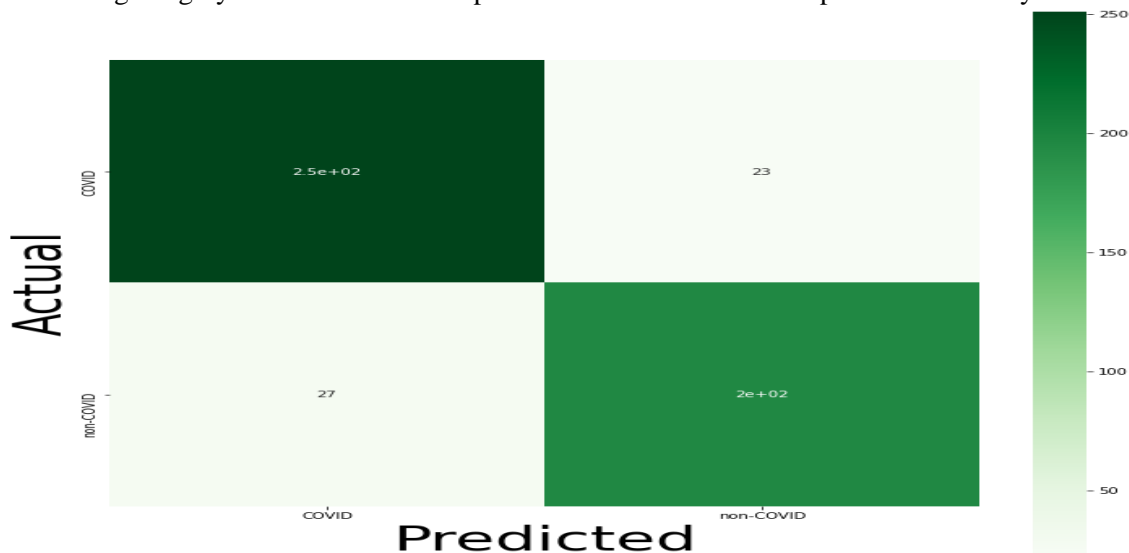

Figure(5) : DenseNet-121 Model classification

Overwhelming majority existing approaches used a small dataset while a relatively large dataset was used for the applied DenseNet-121 model. There have been several images and strategies for validation by the different state-of-the-art approaches. The used sample size and validation approach used by the different authors is indicated in Table 4. Because of the variation in data sets, a fair comparison of results for performance assessment and validation methods is indeed not feasible.

Nevertheless, it is worth mentioning that in such a relatively large dataset of 2482 COVID-19 and nonCovid-19 images the applied technique proved its effectiveness. There are slightly fewer COVID-19 images used by the other approaches. Some other studies [16, 17, 20-26] introduced different approaches for early detection of COVID-19 using X-ray and CT images indicating accuracy rate. In this study a DenseNet-121 architecture-based CNN was used for the efficient detection of COVID-19 using a total number of 2482 images (1252 COVID-19 and 1230 nonCOVID-19) to develop our model. The DenseNet-121 has yielded 89% total accuracy with 90% sensitivity (recall), 84% precision, 89% F1-score and 89% Gmean. Compared to other studies in literature, DenseNet-121 based CNN obtained superior results.

For COVID-19 diagnostic test the applied model could be used with CT images. CT images are better suited because for patients in critical conditions due to its readily available and efficient criteria. The model is capable of instantly identifying COVID-19. Therefore, a deep learning model with CT imagery is recommended because it is more powerful.

Finally, a few main advantages of this study are outlined following:

- I. CT-image classification provides outstanding performance for COVID-19 detection rather than other images like X-ray or Chest images. Additionally, the DenseNet-121 model has better classification accuracy than other studies.
- II. There is no hand-made extraction technique needed for the applied architecture.
- III. To conclude, our study showed that a deep learning approach could be applied to help doctors and/or healthcare engineers diagnose patients with COVID-19 and recognize lesions from CT images automatically.

Table 4: Result comparison with previous studies

Ozturk, Talo [16]	Deep neural network	127- Covid-19 500–nofindings 500 - pneumonia	chest X-ray images	87.02%
Song, Zheng [25]	DRE-Net	777 – Covid-19 708 – nonCovid-19	CT image	86%
Wang, Kang [26]		195 – Covid-19 258- nonCovid-19	CT image	82.9%
Xu, Jiang [24]		219 – Covid-19 175 - Normal 224-Viral Pneumonia	CT image	86.7%
This Study	DenseNet-121	1252 – covid-19 1230–nonCovid-19	CT image	89%

VII. CONCLUSION

The automated image classification of CT images by computer-aided systems is of great importance in medical image analysis. Microscopic analysis of CT images is challenging and time-consuming. In this study, identifying COVID-19 patients using CT image classification based on the machine learning technique has demonstrated with outperformed accuracy. The overall accuracy is 89%, and recall is 90%.

We applied DenseNet-121 deep learning architecture for image classification. Several classification models were, in example, to validate our claim.

Theoretically, the proposed methodology contributed to the current emerging COVID-19 literature providing an unrevealed best alternative identification technique using a DenseNet-121 CNN. Practically, this method can be applied to the clinical practice for accurate COVID-19 detection. Thus, increasing reliability represented through the proposed computational method for testing could add value to capture a real picture of infection rate, which has a strong correlation to the number of daily infected cases. The applied methodology offered a powerful machine learning-based approach to minimize errors of human professionals' manual judgment as well as providing a quicker way of offering time and resource-saving.

For further research development, DenseNet can be justified by applying other types of architecture, i.e., DenseNet-161, DenseNet-169, DenseNet-201. However, other deep learning methods or modified deep learning methods could be implemented and tested for further development and assessment for more accurate identification of COVID-19 patients using CT images.

REFERENCES

- [1] Hasan, N., A Methodological Approach for Predicting COVID-19 Epidemic Using EEMD-ANN Hybrid Model. Internet of Things, 2020. 11: p. 100228.
- [2] Shereen, M.A., et al., COVID-19 infection: Origin, transmission, and characteristics of human coronaviruses. Journal of Advanced Research, 2020. 24: p. 91-98.
- [3] Liu, R., et al., Positive rate of RT-PCR detection of SARS-CoV-2 infection in 4880 cases from one hospital in Wuhan, China, from Jan to Feb 2020. Clinica Chimica Acta, 2020. 505: p. 172-175.
- [4] Singh, D., et al., *Classification of COVID-19 patients from chest CT images using multi-objective differential evolution-based convolutional neural networks*. European journal of clinical microbiology & infectious diseases : official publication of the European Society of Clinical Microbiology, 2020: p. 1-11.
- [5] Ai, T., et al., Correlation of Chest CT and RT-PCR Testing in Coronavirus Disease 2019 (COVID-19) in China: A Report of 1014 Cases. Radiology, 2020: p. 200642.
- [6] Giri, A.K. and D.R. Rana, Charting the challenges behind the testing of COVID-19 in developing countries: Nepal as a case study. Biosafety and Health, 2020.
- [7] Fang, Y., et al., Sensitivity of Chest CT for COVID-19: Comparison to RT-PCR. Radiology, 2020: p. 200432.
- [8] Krizhevsky, A., I. Sutskever, and G.E. Hinton. *Imagenet classification with deep convolutional neural networks*. in *Advances in neural information processing systems*. 2012.
- [9] Qin, J., et al., A biological image classification method based on improved CNN. Ecological Informatics, 2020. 58: p. 101093.
- [10] Gottapu, R.D. and C.H. Dagli, DenseNet for Anatomical Brain Segmentation. Procedia Computer Science, 2018. 140: p. 179-185.
- [11] uang, G., et al. Densely connected convolutional networks. in Proceedings of the IEEE conference on computer vision and pattern recognition. 2017.
- [12] Gao, L., et al., Handling imbalanced medical image data: A deep-learning-based one-class *classification approach*. Artificial Intelligence in Medicine, 2020. 108: p. 101935.
- [13] Lodhi, B. and J. Kang, Multipath-DenseNet: A Supervised ensemble architecture of densely connected convolutional networks. Information Sciences, 2019. 482: p. 63-72.
- [14] Carcagni, P., et al. *Classification of Skin Lesions by Combining Multilevel Learnings in a DenseNet Architecture*. in *Image Analysis and Processing — ICIAP 2019*. 2019. Cham: Springer International Publishing.
- [15] Pereira, R.M., et al., *COVID-19 identification in chest X-ray images on flat and hierarchical classification scenarios*. Computer Methods and Programs in Biomedicine, 2020. 194: p. 105532.
- [16] Ozturk, T., et al., *Automated detection of COVID-19 cases using deep neural networks with X-ray images*. Computers in Biology and Medicine, 2020. 121: p. 103792.
- [17] Panwar, H., et al., *Application of deep learning for fast detection of COVID-19 in X-Rays using nCOVnet*. Chaos, Solitons & Fractals, 2020. 138: p. 109944.
- [18] Wang, X., et al., *A Weakly-supervised Framework for COVID-19 Classification and Lesion Localization from Chest CT*. IEEE Transactions on Medical Imaging, 2020: p. 1-1.
- [19] Wang, G., et al., *A Noise-robust Framework for Automatic Segmentation of COVID-19 Pneumonia Lesions from CT Images*. IEEE Transactions on Medical Imaging, 2020: p. 1-1.
- [20] Soares, E., et al., *SARS-CoV-2 CT-scan dataset: A large dataset of real patients CT scans for SARS-CoV-2 identification*. medRxiv, 2020: p. 2020.04.24.20078584.
- [21] Ucar, F. and D. Korkmaz, *COVIDagnosis-Net: Deep Bayes-SqueezeNet based diagnosis of the coronavirus disease 2019 (COVID-19) from X-ray images*. Medical Hypotheses, 2020. 140: p. 109761.
- [22] Pathak, Y., et al., *Deep Transfer Learning Based Classification Model for COVID-19 Disease*. IRBM, 2020.

[23] Panwar, H., et al., *A deep learning and grad-CAM based color visualization approach for fast detection of COVID-19 cases using chest X-ray and CT-Scan images*. Chaos, Solitons & Fractals, 2020. 140 p. 110190.

[24] Xu, X., et al., *A Deep Learning System to Screen Novel Coronavirus Disease 2019 Pneumonia*.

Engineering, 2020.

[25] Song, Y., et al., *Deep learning enables accurate diagnosis of novel coronavirus (COVID-19) with CT images*. medRxiv, 2020.

[26] Wang, S., et al., *A deep learning algorithm using CT images to screen for Corona Virus Disease (COVID-19)*. MedRxiv, 2020.

